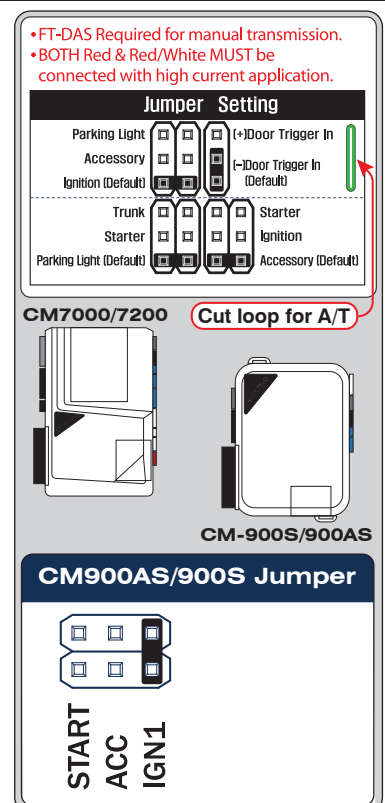
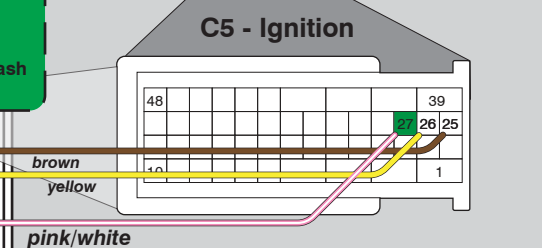
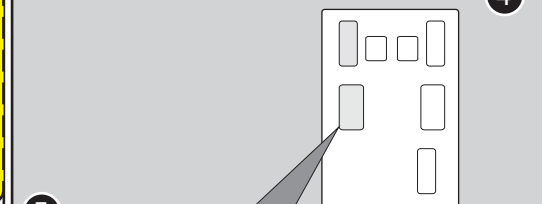
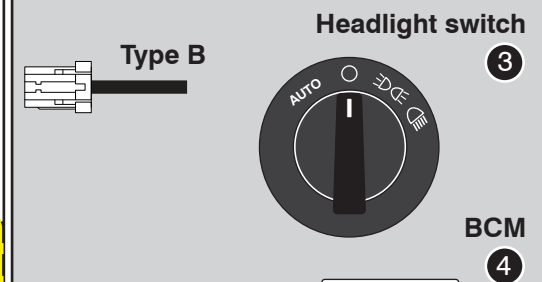
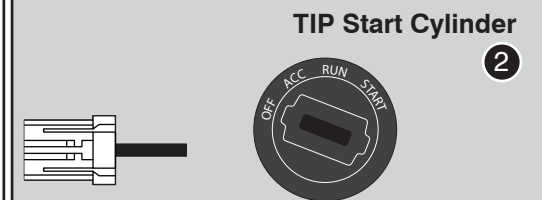
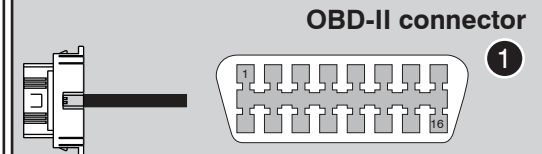
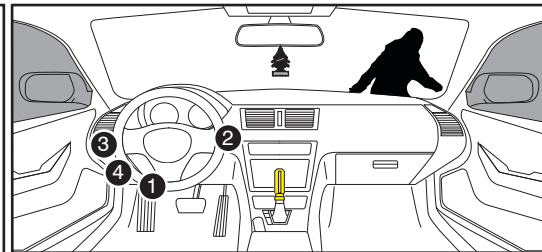
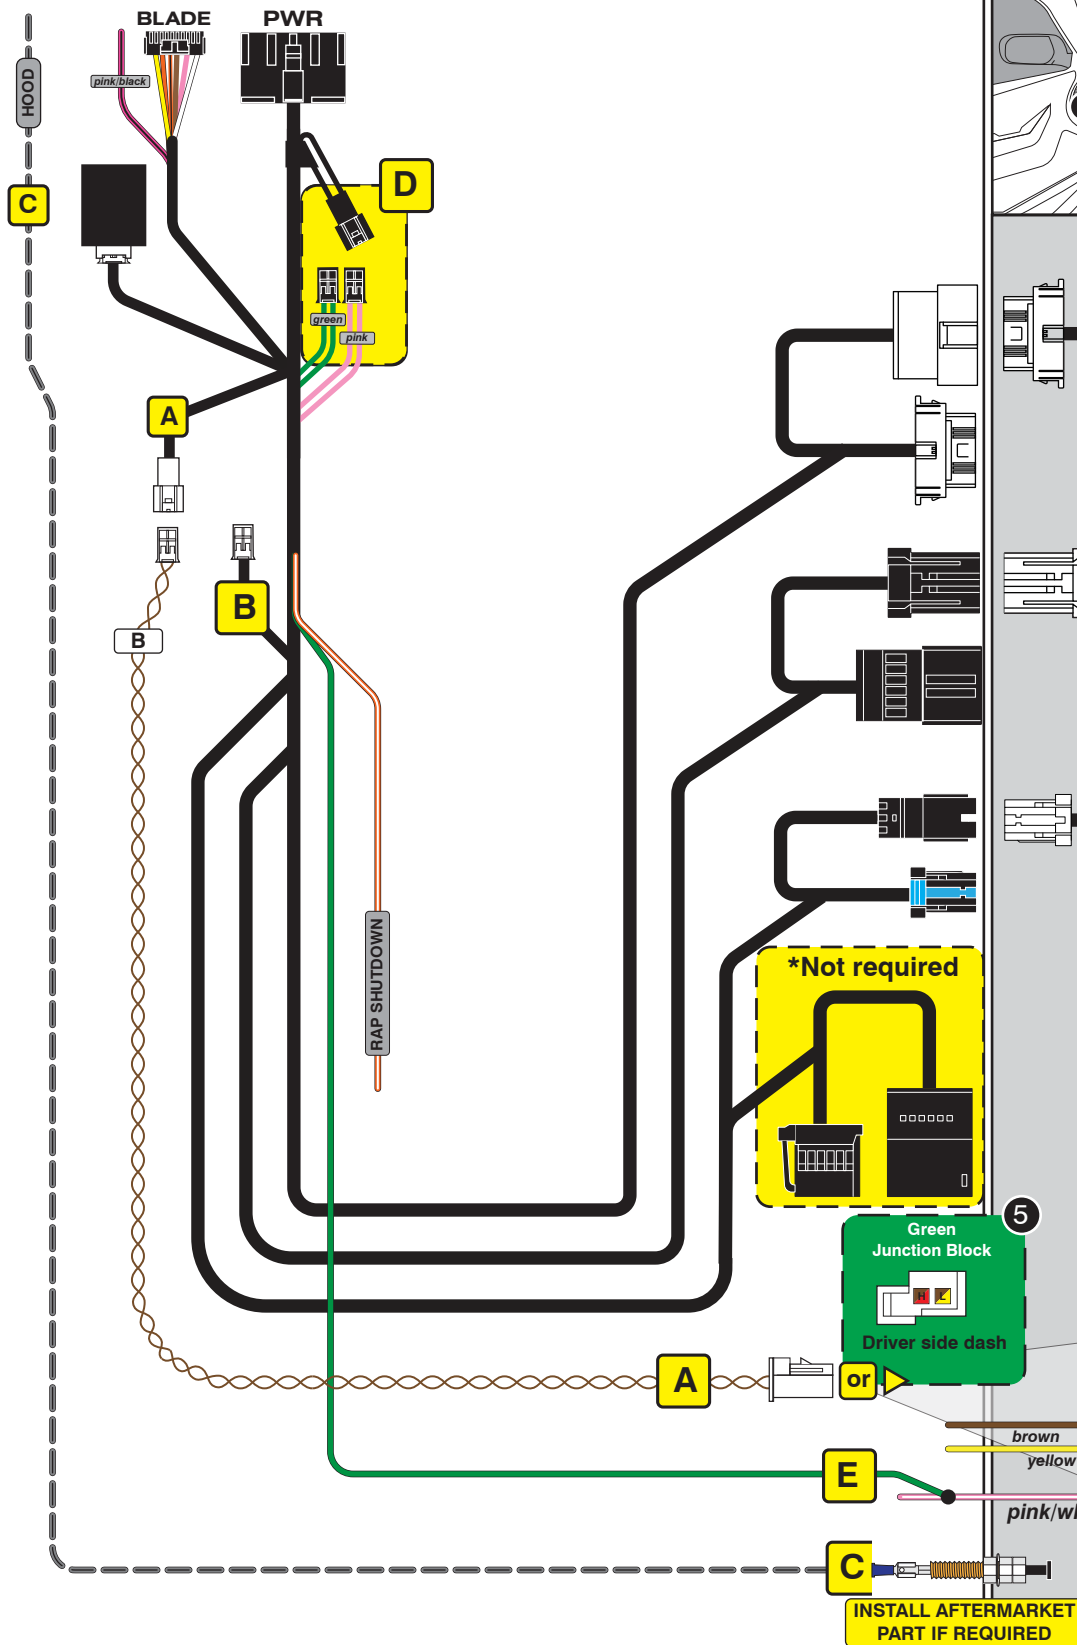


FIRSTECH, LLC.
SUPPORT • 1(888) 820-3690, EXT. 203
















Códigos de error de programación de LED











Códigos de error de programación de EBC

El EBCError Global, que aparece en pantalla cuando se realiza una programación, indica el tipo de error que se ha producido. Los códigos de error de programación de EBC son los siguientes:

- 2x- Código de EBC que indica que el cableado de las bobinas de CAN no es correcto.
- 3x- No hay conexión de la línea de alimentación, verifique la conexión inmovilizada.
- 4x- Sin la CAN, se debe quitar la conexión de EBC, verifique la conexión.
- 5x- Sin la CAN, verifique la conexión de las bobinas de CAN.
- 6x- No hay datos de diagnóstico de las bobinas de CAN inmovilizada.
- 7x- Sin los datos de diagnóstico de la bobina de la bobina de programación.
- 8x- No hay los datos de diagnóstico de la bobina de la bobina de programación.
- 9x- Sin los datos de diagnóstico de la bobina, verifique la conexión.
- 10x- No hay los datos de diagnóstico de la bobina, Error de Klon, rehacer Klon.

MODULE PROGRAMMING PROCEDURE - WITH KLON

- 1  Close driver door.
 Re-open driver door to wake up data bus.
- 2  Press UNLOCK on OEM remote.
If the vehicle is not equipped with an OEM remote, press the module programming button.
- 3  Wait, LED will flash BLUE once [1x].
- 4  Turn key to ON position.
- 5  Wait, LED will turn solid RED.
- 6  Turn key to OFF position.
- 7  Remove key.
- 8  Insert key into ignition.
- 9  Turn key to ON position.
- 10  Wait, LED will flash BLUE.

- 11  Turn key to OFF position.
- 12  **WARNING:**
Disconnect power last.
Disconnect RS from vehicle.
- 13  Connect RS to computer and proceed with extended programming.
- 14  **WARNING:** Do not press RS programming button.
Connect power first.
Connect RS to vehicle.
- 15  Turn key to ON position.
- 16  Wait, LED will turn solid BLUE for 2 seconds.
- 17  Turn key to OFF position.
- 18  Turn key to START position.
- 19  Turn key to OFF position.
- 20  Module Programming Procedure completed.

WARNING: READ BEFORE REMOTE STARTING THE VEHICLE

IMPORTANT

- All vehicle doors must be closed and locked prior to remote start sequence. Failure to comply will result in remote starter malfunction.

TAKE OVER PROCEDURE - TO THE VEHICLE OWNER

NOTE

- All vehicle doors must be closed and locked prior to remote start sequence.




TIME RESTRICTION COMING UP !

1



Press UNLOCK on after-market remote.

2



TIME RESTRICTION

Within 45 SECONDS from previous step:

Open vehicle door.
Enter vehicle.
Close vehicle door.
Insert key into ignition.
Turn key to ON position.
Press and release BRAKE pedal.

3

Take over procedure completed.



Failure to follow procedure within time restriction will result in vehicle engine shutdown.