## FTI-GMT3: Vehicle Coverage and Preparation Notes

Make	Model	Year	Install	CAN	Lights	Туре	BCM	Configuration	
DL-GM12					Park / Auto			Feature Option	
Chevrolet	Colorado STD Key AT	2021-22	Type 2	Type B	Type A	Key	LSC	Opt 1-11 to 3	
	w/o OnStar with OEM Alarm		+ Locks						

Firmware: This installation uses **BLADE-AL(DL)-GM12**, flash module and update the controller firmware before installing.

**Install**: **Type 2** installation sources CAN data from the white connector of the BCM, requiring the use of the '**B-connector**, the connector marked 'A' is not used.

**Lights: Type A** lights (standard parking lights) are provided, as are **Type H** (hazard lights), both incorporated in the harness for visual display of runtime status/diagnostics. Re-pinning of the CM I/O (gray) harness is required, regardless of which type you choose to use, both options have been provided for your selection. If you choose hazards you will also need to configure the selected POC for one of the following hazard control options, **Hazard1** (POC option #30 (momentary) **or Hazard2** (POC option #23 (latching), depending on hazard switch operation.

**Locks:** The CM lock connector is mandatory for this installation type. The harness assembly is pre-wired provide the necessary analog control.

ACC configuration: No Onstar/OEM Alarm install requires an ACC pulse with disarm, to properly control the equipped OEM alarm system. Set feature option 1-11 to option 3 (ACC pulse, same timing as disarm pulse)

## Lock connector is REQUIRED for this installation type. :)

Configuration of feature option 1-11 to option 3 (ACC pulse, same timing as disarm) is REQUIRED. :)

FEATURE COVERAGE

 $\bigcirc$ 

**AP SHUTDOWN** 

**3AKE STATUS** 

00000000

TA/MUX IGN/ST

DOD STATUS

**BRAKE STATUS** 

CH OUTPUT

CURE TAKEOVER

**RKING LIGHTS** 

 $| \bigcirc$ 

**XZARD LIGHTS** 

0

**JOR STATUS** 

 $\bigcirc$ 

LOCK START


## FTI-GMT3 - Installation and Configuration Notes


- A REQUIRED CONNECTION, SEE NOTE ABOVE
- B REQUIRED CONNECTION
- C REQUIRED CONFIGURATION TYPE B
- D REQUIRED CONFIGURATION KEY TYPE

0

**MMOBILIZER DATA** 

E REQUIRED SETTINGS CHANGE

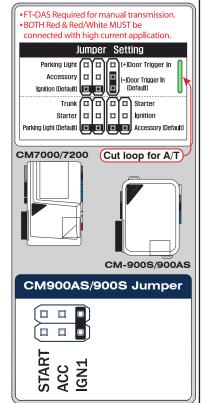

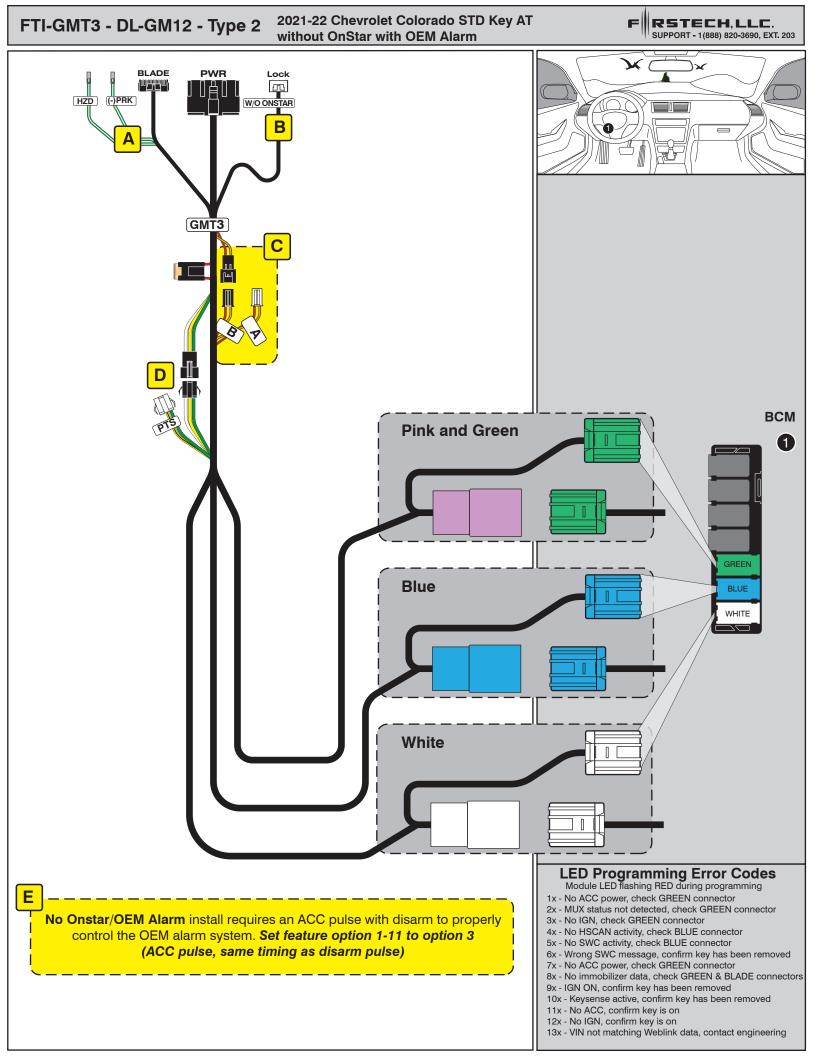

# INSTALL GUIDE

B	L	<b>F</b>	2		E
	se	I R	ΙE	s	


## DOORLOCK INTERFACE GENERAL MOTORS

Patent No. US 8,856,780 CA 2759622 COM-BLADE-AL(DL)-GM12-EN

Doc. No.: ##74801## 20210312

Page 58 of 59


CARTRIDGE INSTALLATION



Slide cartridge into unit. Notice button under LED.

2

Ready for Module Programming Procedure.

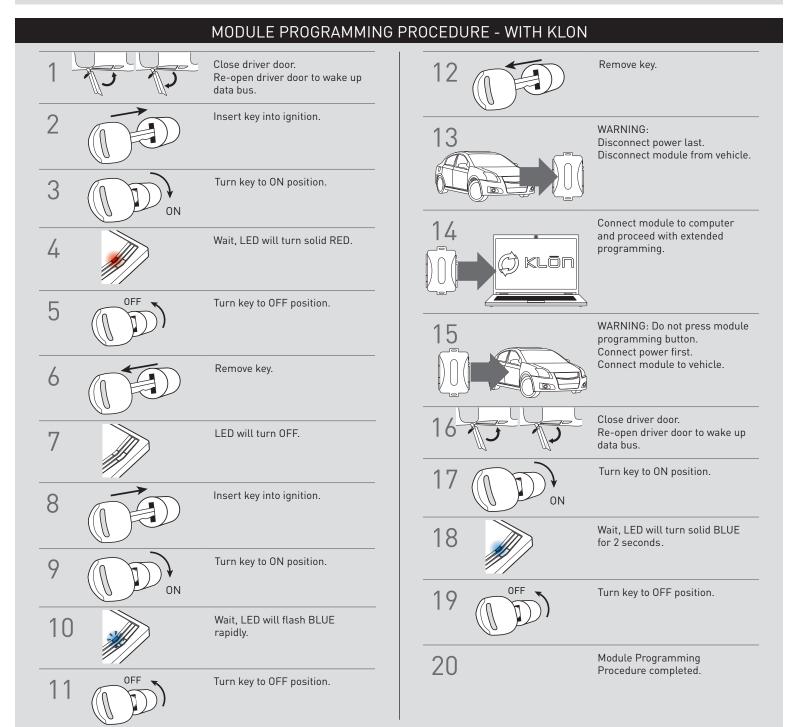

### WWW.IDATALINK.COM

#### Automotive Data Solutions Inc. © 2020