

FTI-HDP8: Vehicle Coverage and Preparation Notes

Make	Model	Year	Install	CAN	Lights	BCM	Clutch	S-NET Data
DL-HA6 Honda	Odyssey PTS AT	2018-20	Type 1	Blue	Park / Auto white/pink	AFB	N/A	BCM Gray 40-pin Lt. Green

Firmware:

This installation requires **BLADE-AL(DL)-HA6** firmware, flash module and update the controller firmware before installing.

Lights:

This kit includes a pre-terminated harness for the purpose of connecting the parking lights and clutch wire (when required). Use of the included harness requires modification of the gray I/O connector of the control module, removal of the existing parking light and status wires (the negative start wire also, when clutch handling is required), and replacing them with wires from the included harness. The required connections are located in the gray 28-pin connector, parking lights (pin #11), auto-lights (pin #10)

S-Net:

Gathering S-NET data requires a manual connection to be made at the Gray 40-pin connector of the BCM, the S-NET data wire is located at pin #35 of the connector.

FTI-HDP8: Installation and Configuration Notes

- A** REQUIRED CONNECTION
- B** REQUIRED CONNECTIONS (SEE NOTES REGARDING REQUIRED MODIFICATION)
- C** REQUIRED CONNECTIONS
- D** NOT REQUIRED

•FT-DAS Required for manual transmission.
•BOTH Red & Red/White MUST be connected with high current application.

Jumper Setting

Parking Light	Accessory	Ignition (Default)	(+)Door Trigger In (Default)	(-)Door Trigger In (Default)
Trunk	Starter	Parking Light (Default)	Starter	Ignition
			Accessory (Default)	

CM7000/7200 Cut loop for A/T


CM-900S/900AS

CM900AS/900S Jumper

START
ACC
IGN1



FEATURE COVERAGE																
IMMOBILIZER DATA	AM RS CONTROL	DOOR LOCK	DOOR UNLOCK	ARM OEM ALARM	DISARM OEM ALARM	POWER LIFTGATE	POWER SLIDING DOOR (L)	POWER SLIDING DOOR (R)	DOOR STATUS	TRUNK STATUS	HOOD STATUS	BRAKE STATUS	E-BRAKE STATUS	TACH OUTPUT	AUTOLIGHT CTRL	PARKING LIGHTS

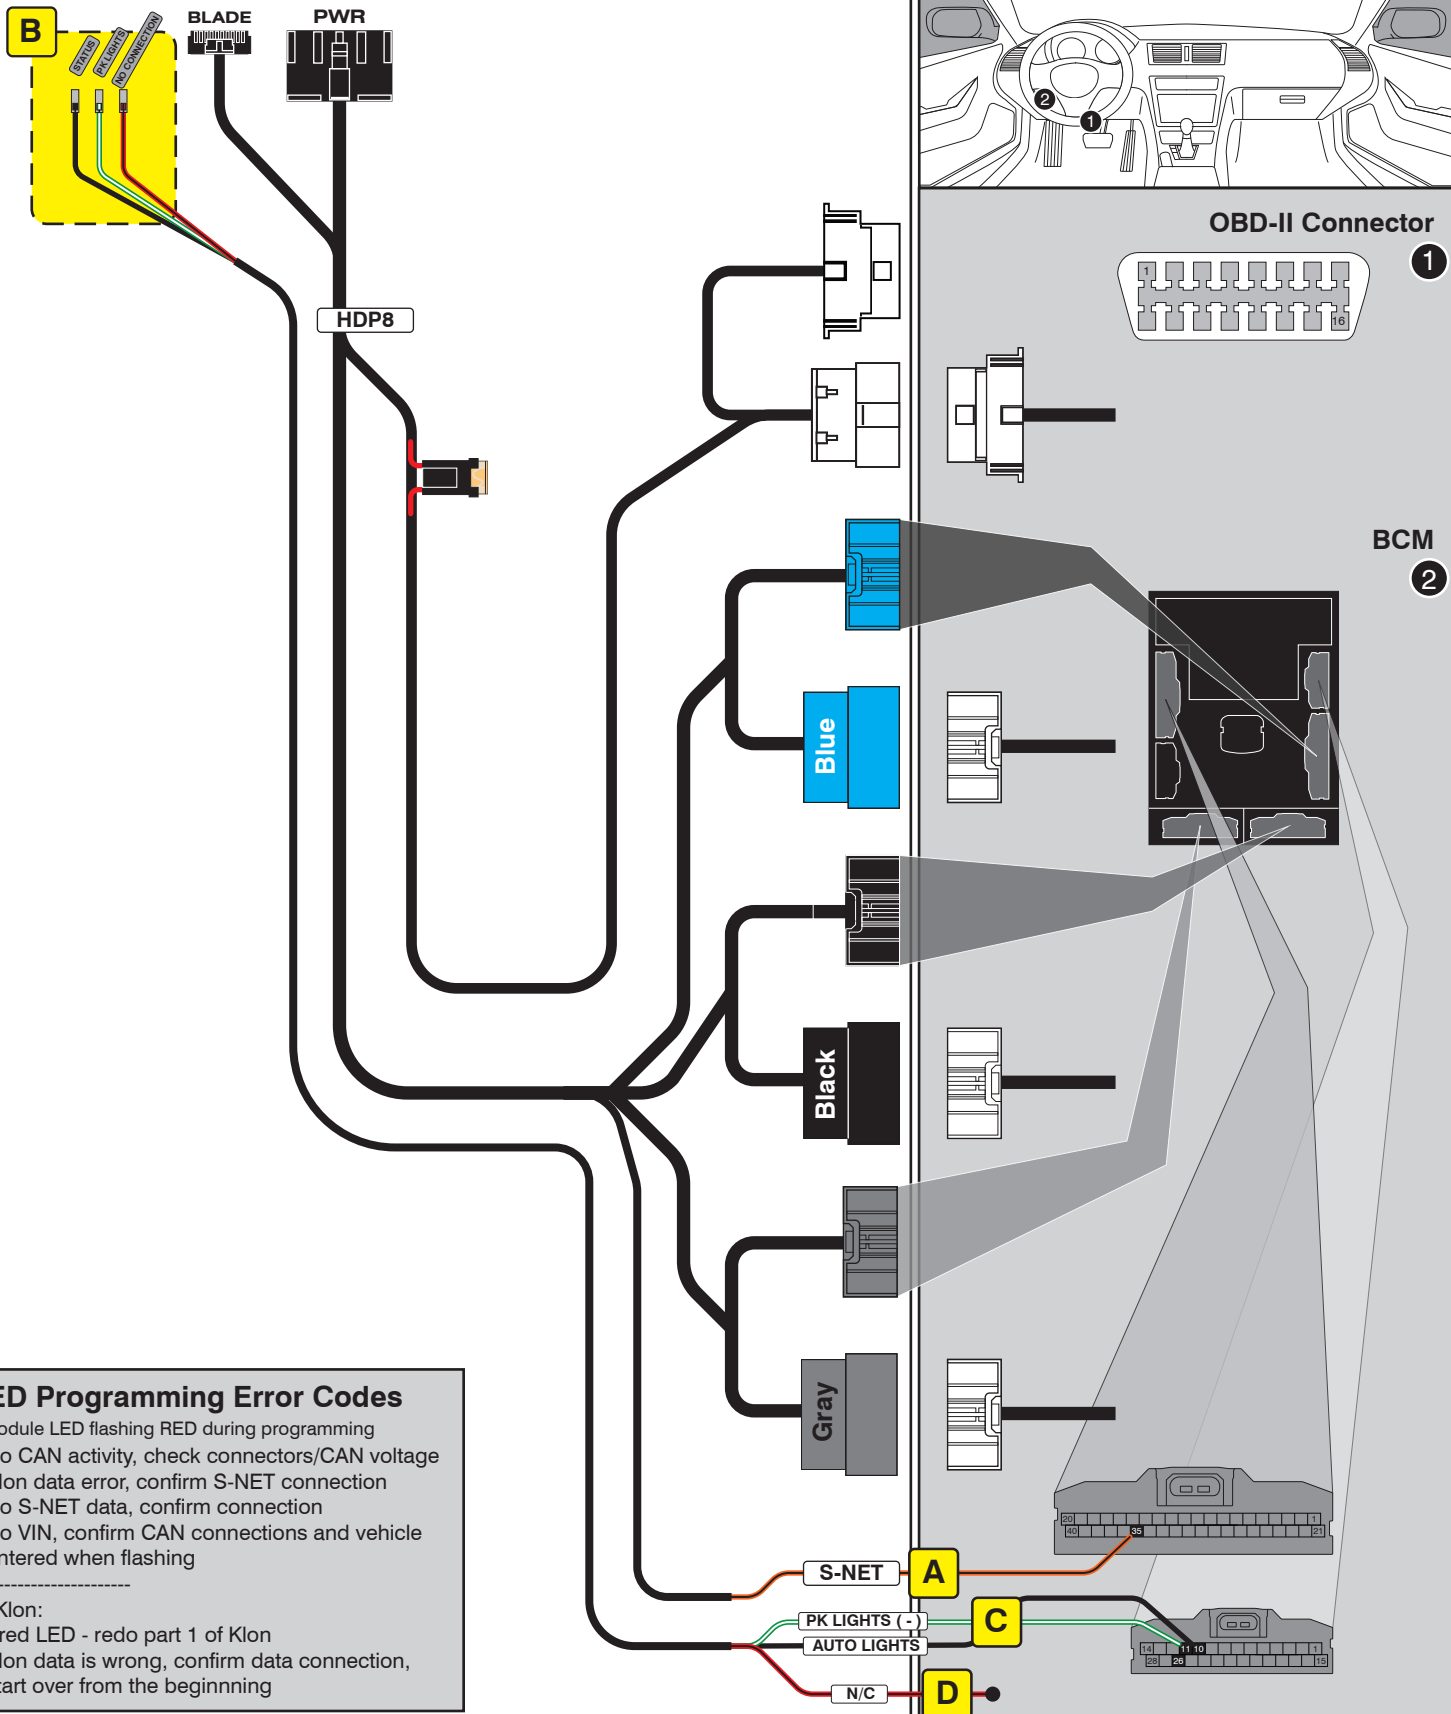

LED Programming Error Codes

Module LED flashing RED during programming


- 1x - No CAN activity, check connectors/CAN voltage
- 2x - Klon data error, confirm S-NET connection
- 3x - No S-NET data, confirm connection
- 4x - No VIN, confirm CAN connections and vehicle entered when flashing

After Klon:

- Solid red LED - redo part 1 of Klon
- 2x - Klon data is wrong, confirm data connection, start over from the beginning

Takeover not supported: Vehicle engine will shut down when doors are opened.

CARTRIDGE INSTALLATION

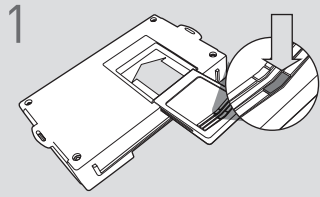


1 Slide cartridge into unit. Notice button under LED.

2


Ready for Module Programming Procedure.

MODULE PROGRAMMING PROCEDURE

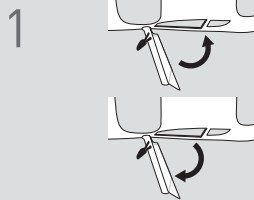

1 Close driver door.


Re-open driver door to wake up data bus.

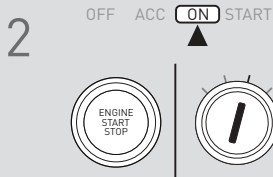


2 Turn ignition to ON position.




3 Wait, LED will flash BLUE rapidly.

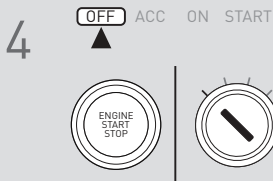


4 Turn ignition to OFF position.

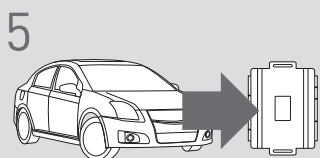


5 **WARNING:**
Disconnect power last.
Disconnect RS from vehicle.

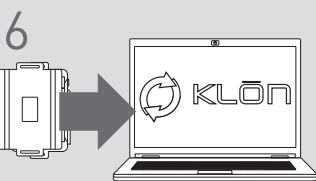

6 Connect RS to computer and proceed with extended programming.

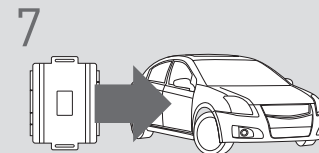


7 **WARNING:** Do not press RS programming button.
Connect power first.
Connect RS to vehicle.

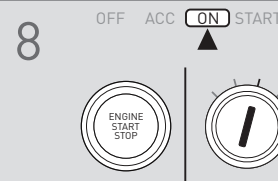

8 Turn ignition to ON position.



9 Wait, LED will turn solid BLUE for 2 seconds.

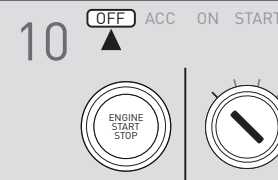

10 Turn ignition to OFF position.



11 Press UNLOCK on the OEM remote.

! If the vehicle is equipped with a power liftgate: Open and close the power liftgate with the OEM keyfob.

12

Module Programming Procedure completed.