

Make	Model	Year	Install	CAN	Lights	BCM	POC	I/O Changes
DL-NI3 Infiniti	Q60 6cyl Intelli-Key PTS AT	2017-21	Type 1	Type A	Park / Auto POC 1 Hazard1/2	PKP	See note	Green White/Blue None/ACC

**Install Type 1** requires **BLADE-AL(DL)-NI3** firmware, flash module and update the controller firmware before installing.

**CAN:** The NSP2 harness, when configured for NI3 applications, does not require a specific configuration of the harness CAN connector, the NI3 CAN connections are hardwired between the **white** 14-pin connector and the Black 40-pin BCM connector.

**Lights:** Visual status confirmations and diagnostic information are provided via hazard lights when using the NSP2 harness. The controller **POC1** output must be configured for one of the following settings (depending on switch type):

- \* **Hazard light [ 30 ]** *momentary hazard switch*
- \* **Hazard light 2 [ 23 ]** *latching hazard switch*

**POC Configuration:**

**CM7/CMX:** POC2 - 2nd START [ 2 ]  
POC3 - 2nd IGN [ 3 ]

**CM9:** POC3 - (-) START  
POC4 - (-) IGNITION

**I/O Changes:** Type 1 requires configuring the CN1 blue wire for ACC output, controller specific settings are listed on the next page.

### Vehicle Damage Warning:

*Caution should be taken to avoid mixing up the BCM connectors, vehicle damage will result if the connectors are positioned improperly. It is advised that you make the BCM connections one at a time, confirming that each T-harness connection is at the correct BCM position before proceeding to the next connection, attempting to program, or attempting to remote start.*

## FTI-NSP2: Installation and Configuration Notes

- A** REQUIRED CONNECTIONS - SECURE UNUSED I/O CONNECTORS
- B** REQUIRED CONNECTIONS - SEE WARNING ABOVE
- C** REQUIRED CONNECTION
- D** REQUIRED CONNECTION - REQUIRES JUMPER/SETTING CONFIGURATION
- E** NOT REQUIRED



FEATURE COVERAGE														
IMMOBILIZER DATA	SECURE TAKEOVER	PRIORITY UNLOCK	DOOR LOCK	DOOR UNLOCK	ARM OEM ALARM	DISARM OEM ALARM	POWER LIFTGATE	TRUNK/HATCH RELEASE	DOOR STATUS	HOOD STATUS	TRUNK STATUS	BRAKE STATUS	TACH OUTPUT	E-BRAKE STATUS
○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


•FT-DAS Required for manual transmission.  
•BOTH Red & Red/White MUST be connected with high current application.

**Jumper Setting**

**CM7000/7200** Cut loop for A/T

**CM-900S/900AS**

**CM900AS/900S Jumper**

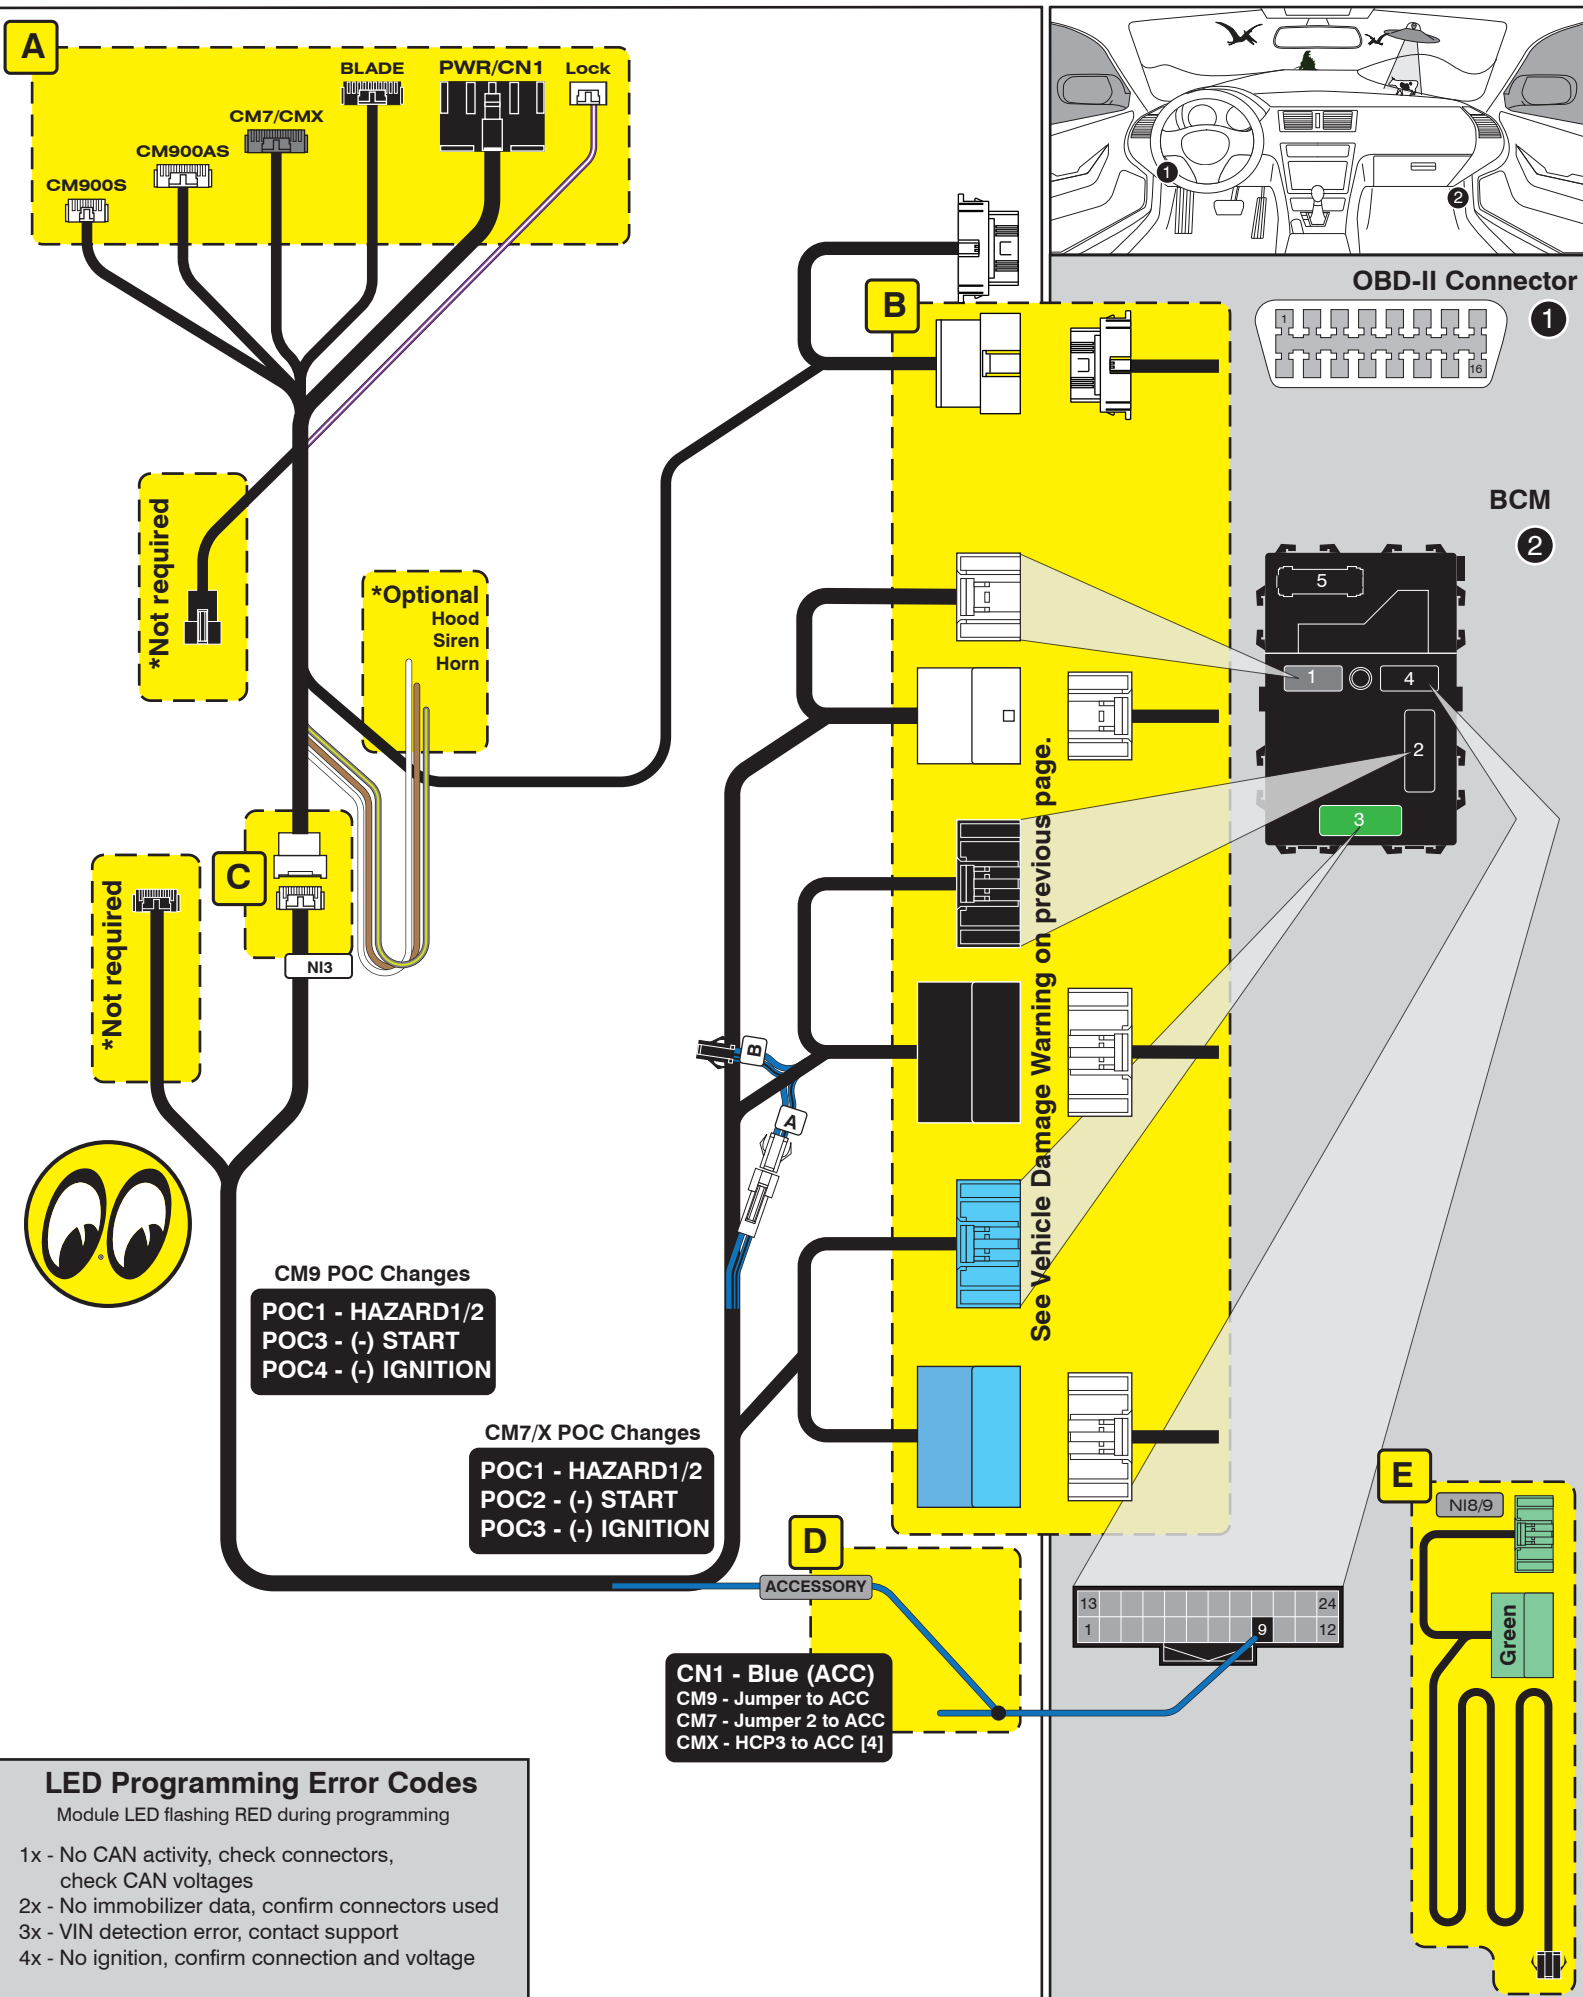

**CM9 POC Changes**  
 POC1 - HAZARD1/2  
 POC3 - (-) START  
 POC4 - (-) IGNITION

**CM7/X POC Changes**  
 POC1 - HAZARD1/2  
 POC2 - (-) START  
 POC3 - (-) IGNITION

**CN1 - Blue (ACC)**  
 CM9 - Jumper to ACC  
 CM7 - Jumper 2 to ACC  
 CMX - HCP3 to ACC [4]


**LED Programming Error Codes**  
 Module LED flashing RED during programming

- 1x - No CAN activity, check connectors, check CAN voltages
- 2x - No immobilizer data, confirm connectors used
- 3x - VIN detection error, contact support
- 4x - No ignition, confirm connection and voltage

See Vehicle Damage Warning on previous page.

## CARTRIDGE INSTALLATION

1




Slide cartridge into unit. Notice button under LED.

2

Ready for Module Programming Procedure.


## MODULE PROGRAMMING PROCEDURE

1




Push start button twice [2x] to ON position.

2



Wait, LED will turn solid BLUE for 2 seconds.

3



Push start button once [1x] to OFF position.

4

Module Programming Procedure completed.

## PUSH TO START VEHICLE TAKE OVER PROCEDURE - TO THE VEHICLE OWNER

### NOTE

- I This procedure is to be followed during remote starter runtime prior to entering vehicle.
- II All vehicle doors must be closed.

1



Press UNLOCK on after-market remote or OEM fob.

2



Open vehicle door.

Enter vehicle WITH THE OEM FOB.

Close vehicle door.

3



Wait for the LED indicator of the push button to be in the ON position.

OR

Wait for the ORANGE LED indicator of the push button to turn on.

4



Press and release BRAKE pedal.

5



It is safe to select gear ONLY AFTER LED indicator is in ON position.

6

Push to Start vehicle take over procedure completed.



Failure to follow procedure may result in vehicle displaying CHECK ENGINE or TIRE PRESSURE error messages.