

















FIRSTECH, LLC.
SUPPORT - 1(888) 820-3690, EXT. 203

• FT-DAS Required for manual transmission.
 • BOTH Red & Red/White MUST be connected with high current application.

Jumper Setting			
 Parking Light Accessory Ignition (Default)	 	 	(+)Door Trigger In (-)Door Trigger In (Default)
	 	 	Starter Ignition
 Trunk Starter Parking Light (Default)	 	 	Accessory (Default)






CM7000/7200




CMX

Cut loop for A/T

CM900AS/900S Jumper




CM-900S/900AS


START

ACC

IGN1

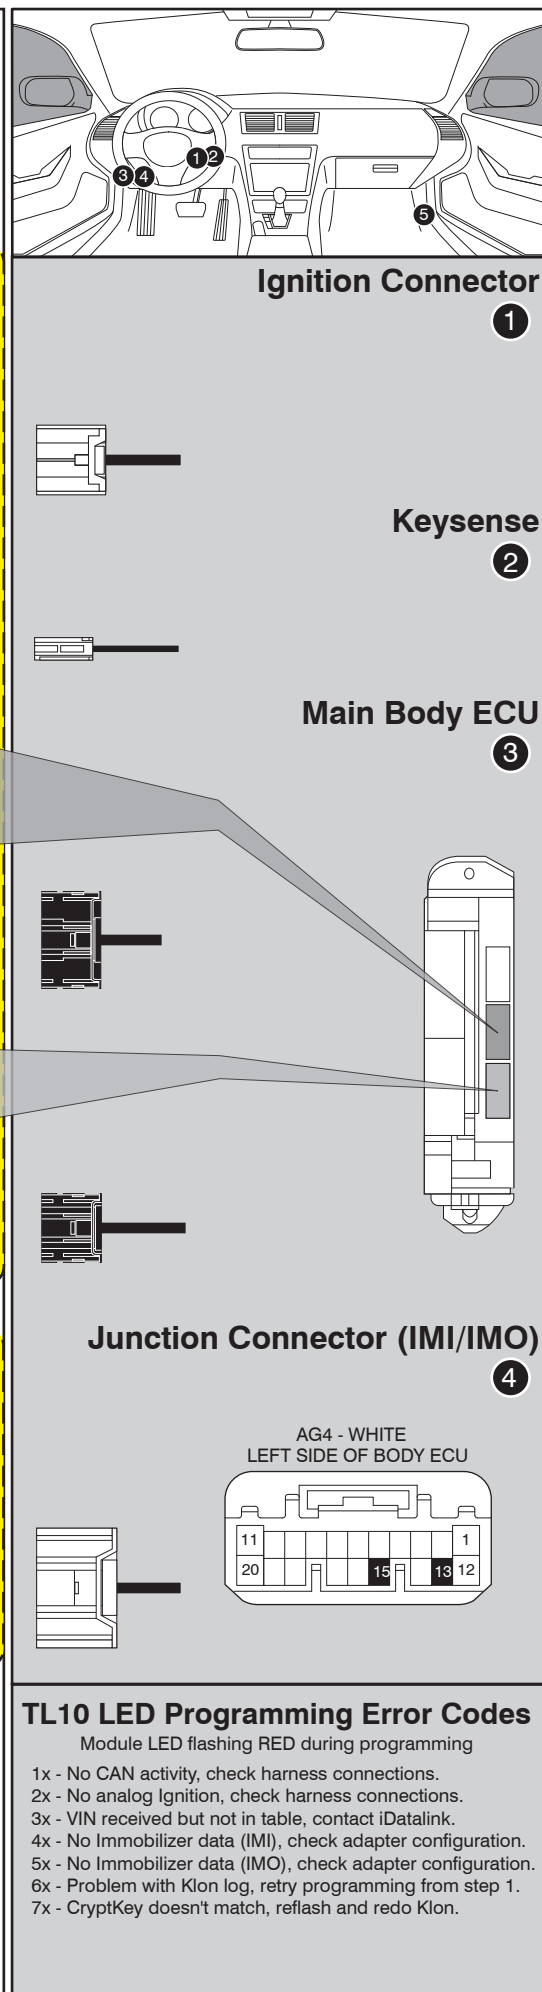

CARTRIDGE INSTALLATION



Slide cartridge into unit. Notice button under LED.

2

Ready for Module Programming Procedure.

MODULE PROGRAMMING PROCEDURE

NOTE


! IMPORTANT: The hood must be closed.

1 OFF ACC **ON** START

Set ignition to ON position.



2



Wait, LED will turn solid RED to confirm that the ignition is ON.

3



Wait, LED will flash BLUE rapidly.

4 OFF ACC **ON** START

Set ignition to OFF position.




5




WARNING:
Disconnect power last.
Disconnect module from vehicle.

6



Connect module to computer and proceed with extended programming.

7



WARNING:
Connect power first.
Connect module to vehicle.


8

OFF ACC **ON** START

Set ignition to ON position.




9



Wait, LED will turn solid RED to confirm that the ignition is ON.

10



Wait, LED will turn solid BLUE for 2 seconds.

11

OFF ACC **ON** START

Set ignition to OFF position.



12

Module Programming Procedure completed.