




**FIRSTECH, LLC.**  
SUPPORT • 1(888) 820-3690, EXT. 203

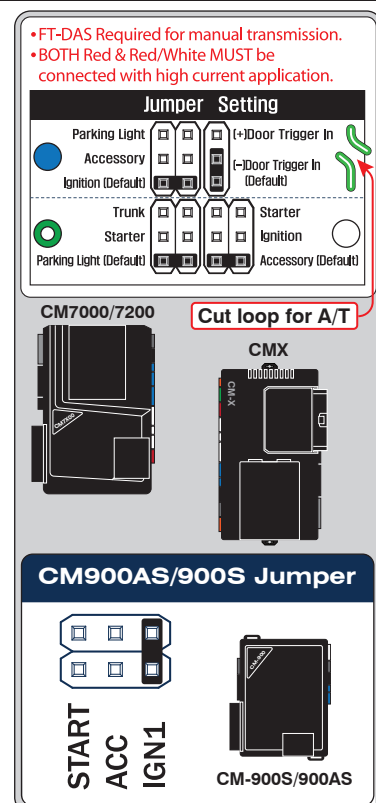

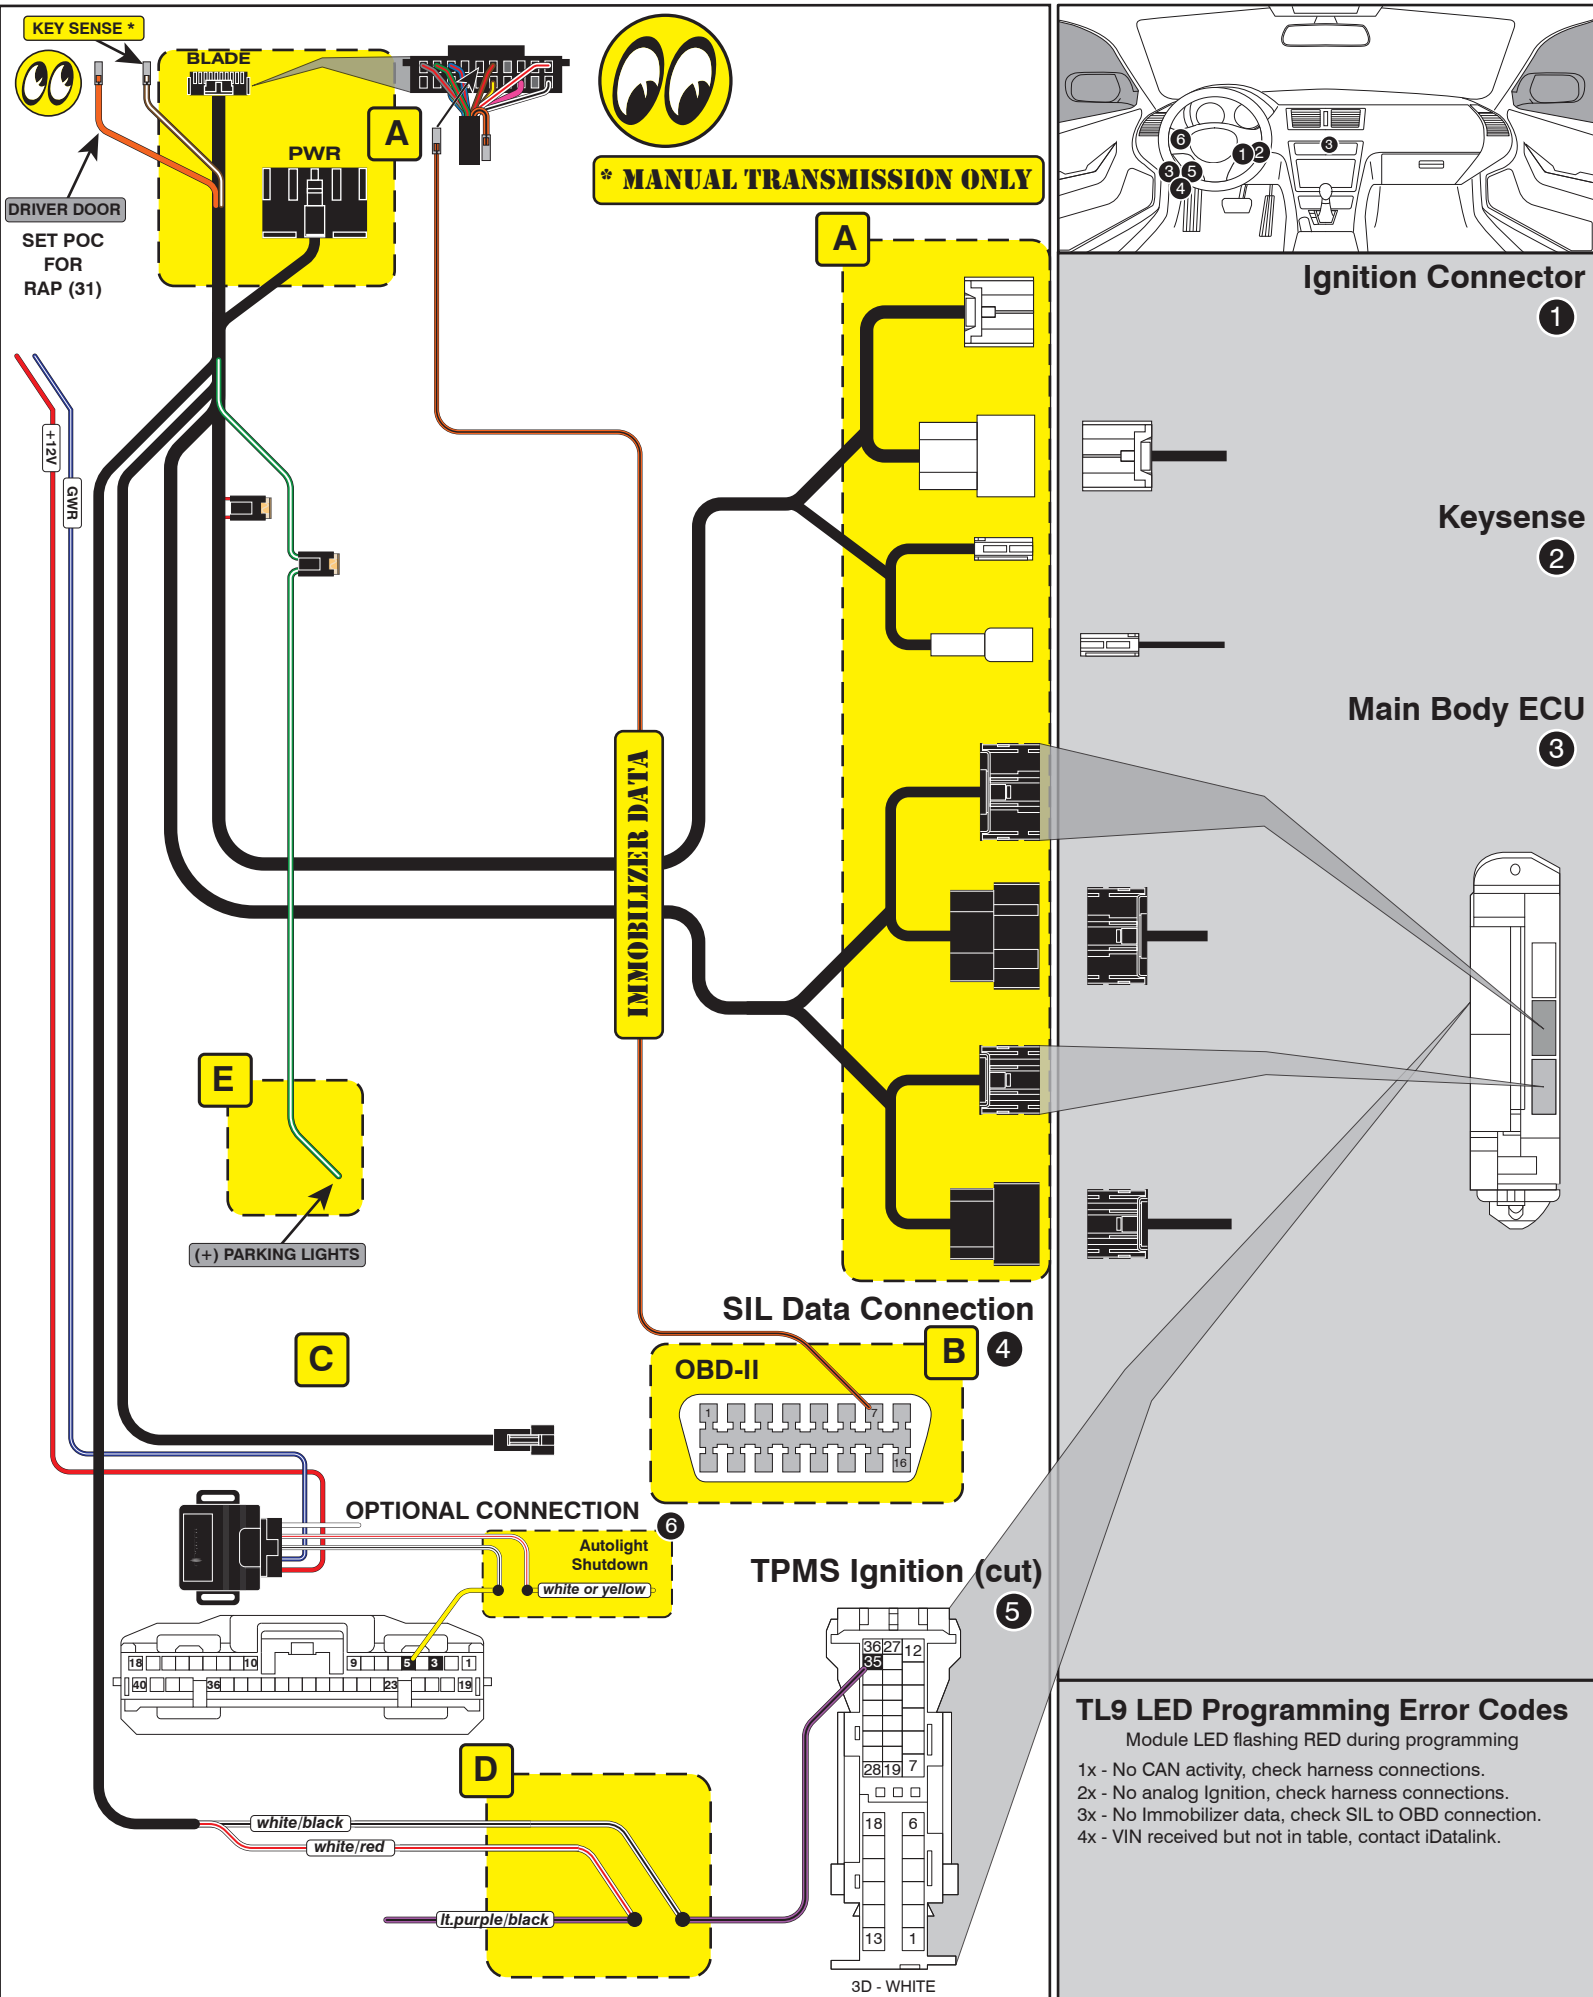

## CARTRIDGE INSTALLATION



Slide cartridge into unit. Notice button under LED.

2

Ready for Module Programming Procedure.

## MODULE PROGRAMMING PROCEDURE

### NOTE


**!** IMPORTANT: The hood must be closed.

1 OFF ACC **ON** START

Set ignition to ON position.



2



Wait, LED will turn solid RED to confirm that the ignition is ON.

3




Wait, LED will flash BLUE rapidly.

4 OFF ACC ON START

Set ignition to OFF position.




5



**WARNING:**  
Disconnect power last.  
Disconnect module from vehicle.

6



Connect module to computer and proceed with extended programming.

7



**WARNING:**  
Connect power first.  
Connect module to vehicle.


8

OFF ACC **ON** START

Set ignition to ON position.




9



Wait, LED will turn solid RED to confirm that the ignition is ON.

10



Wait, LED will turn solid BLUE for 2 seconds.

11

OFF ACC ON START

Set ignition to OFF position.



12

Module Programming Procedure completed.