

| Make | Model | Year | Install | CAN | Lights | BCM | Locks | Clutch |
|--------------------|------------|---------|--------------------|-------|-----------------|-----|--------|--|
| DL-NI5 Infiniti | G37 PTS MT | 2009-13 | Type 2 Clutch 1 | CAN A | Optional RED | PKP | Type B | Clutch Assembly C1 - gray (+) C2 - lt.blu (open) |

Type 2 installation requires BLADE-AL(DL)-NI5 firmware and CM7/X controller, flash module and update controller before install.

NI-LOCK harness configuration: Lock connections for Intelli-key vehicles are type B, secure unused connectors for safety.

Optional Hazard Light Control: NI-LOCK harness hazard provision (**green/white**) is not compatible with this vehicle.

RAP Shutdown: Pre-wired in NI-LOCK harness to driver's door pin at BCM, connect **CM POC** configured for RAP to **orange/white** wire in **NI-LOCK** harness.

PARKING LIGHTS: Positive parking lights are available at the rear of the fuse junction panel if you prefer parking light over hazard lights, connector E103/106/6, pin #9, colors* vary by year and model, test circuit behavior to confirm light activity.

NI-LOCK/NI5 Behavior and wiring options: NI-LOCK accessory harness is capable of providing connection to **ARM & DISARM (lock A, B, or C), RAP (org/wht), and HAZARD (grn/wht)** connections in a single connector at the BCM.



NI5 firmware is capable of providing control over the factory alarm, automatically disarming the alarm when remote start is engaged, by providing ignition and immobilizer data emulating key presense. The alarm will disarm when needed but will not rearm at the end of a remote start session, so this must also be considered. No additional arm/disarm wiring is required, but upon a normal unlock using aftermarket remotes the instrument cluster will illuminate as a result of ignition activity. If this activity is an issue, mandatory connection of the arm/disarm wires at the BCM is required, as well as using the circuit jumper in note [B] of the installation diagram.

Clutch Bypass: Vehicles equipped with a manual transmission require additional wiring to allow a successful remote start. There are two clutch circuits that need to be manipulated, **Clutch 1 (C1)** requiring a +12V signal, and **Clutch 2 (C2)** requiring the circuit to be opened. Both circuit actions required during start. The illustration details the modification of the **NSP1 Brake** harness used for the C1 circuit, connect as illustrated, and the additional wiring required for manipulating C2 (additional relay required).

FTI-NSP1: Installation and Configuration Notes

- A** CONNECTIONS REQUIRED - REFER TO CLUTCH BYPASS NOTE FOR DETAILS
- B** NOT REQUIRED - SEE FIRMWARE NOTE ABOVE
- C** REQUIRED CONNECTION
- D** CONFIGURE AND CONNECT AS ILLUSTRATED
- E** OPTIONAL CONNECTION



| FEATURE COVERAGE | | | | | | | | | | | | | | |
|------------------|-----------------|-----------|-------------|------------------|----------------|----------------|---------------------|-------------|-------------|--------------|--------------|--------------|----------------|--|
| IMMOBILIZER DATA | SECURE TAKEOVER | DOOR LOCK | DOOR UNLOCK | DISARM OEM ALARM | A/M ALARM CTRL | A/M RS CONTROL | TRUNK/HATCH RELEASE | DOOR STATUS | HOOD STATUS | TRUNK STATUS | BRAKE STATUS | TRACH OUTPUT | E-BRAKE STATUS | |
| | | | | | | | | | | | | | | |

•FT-DAS Required for manual transmission.
•BOTH Red & Red/White MUST be connected with high current application.

Jumper Setting


| | | | | |
|---------------|-----------|-------------------------|------------------------------|------------------------------|
| Parking Light | Accessory | Ignition (Default) | (+)Door Trigger In (Default) | (-)Door Trigger In (Default) |
| Trunk | Starter | Parking Light (Default) | Starter | Ignition |
| | | | | Accessory (Default) |

CM7000/7200 Cut loop for A/T

CM-900S/900AS

CM900AS/900S Jumper

START
ACC
IGN1

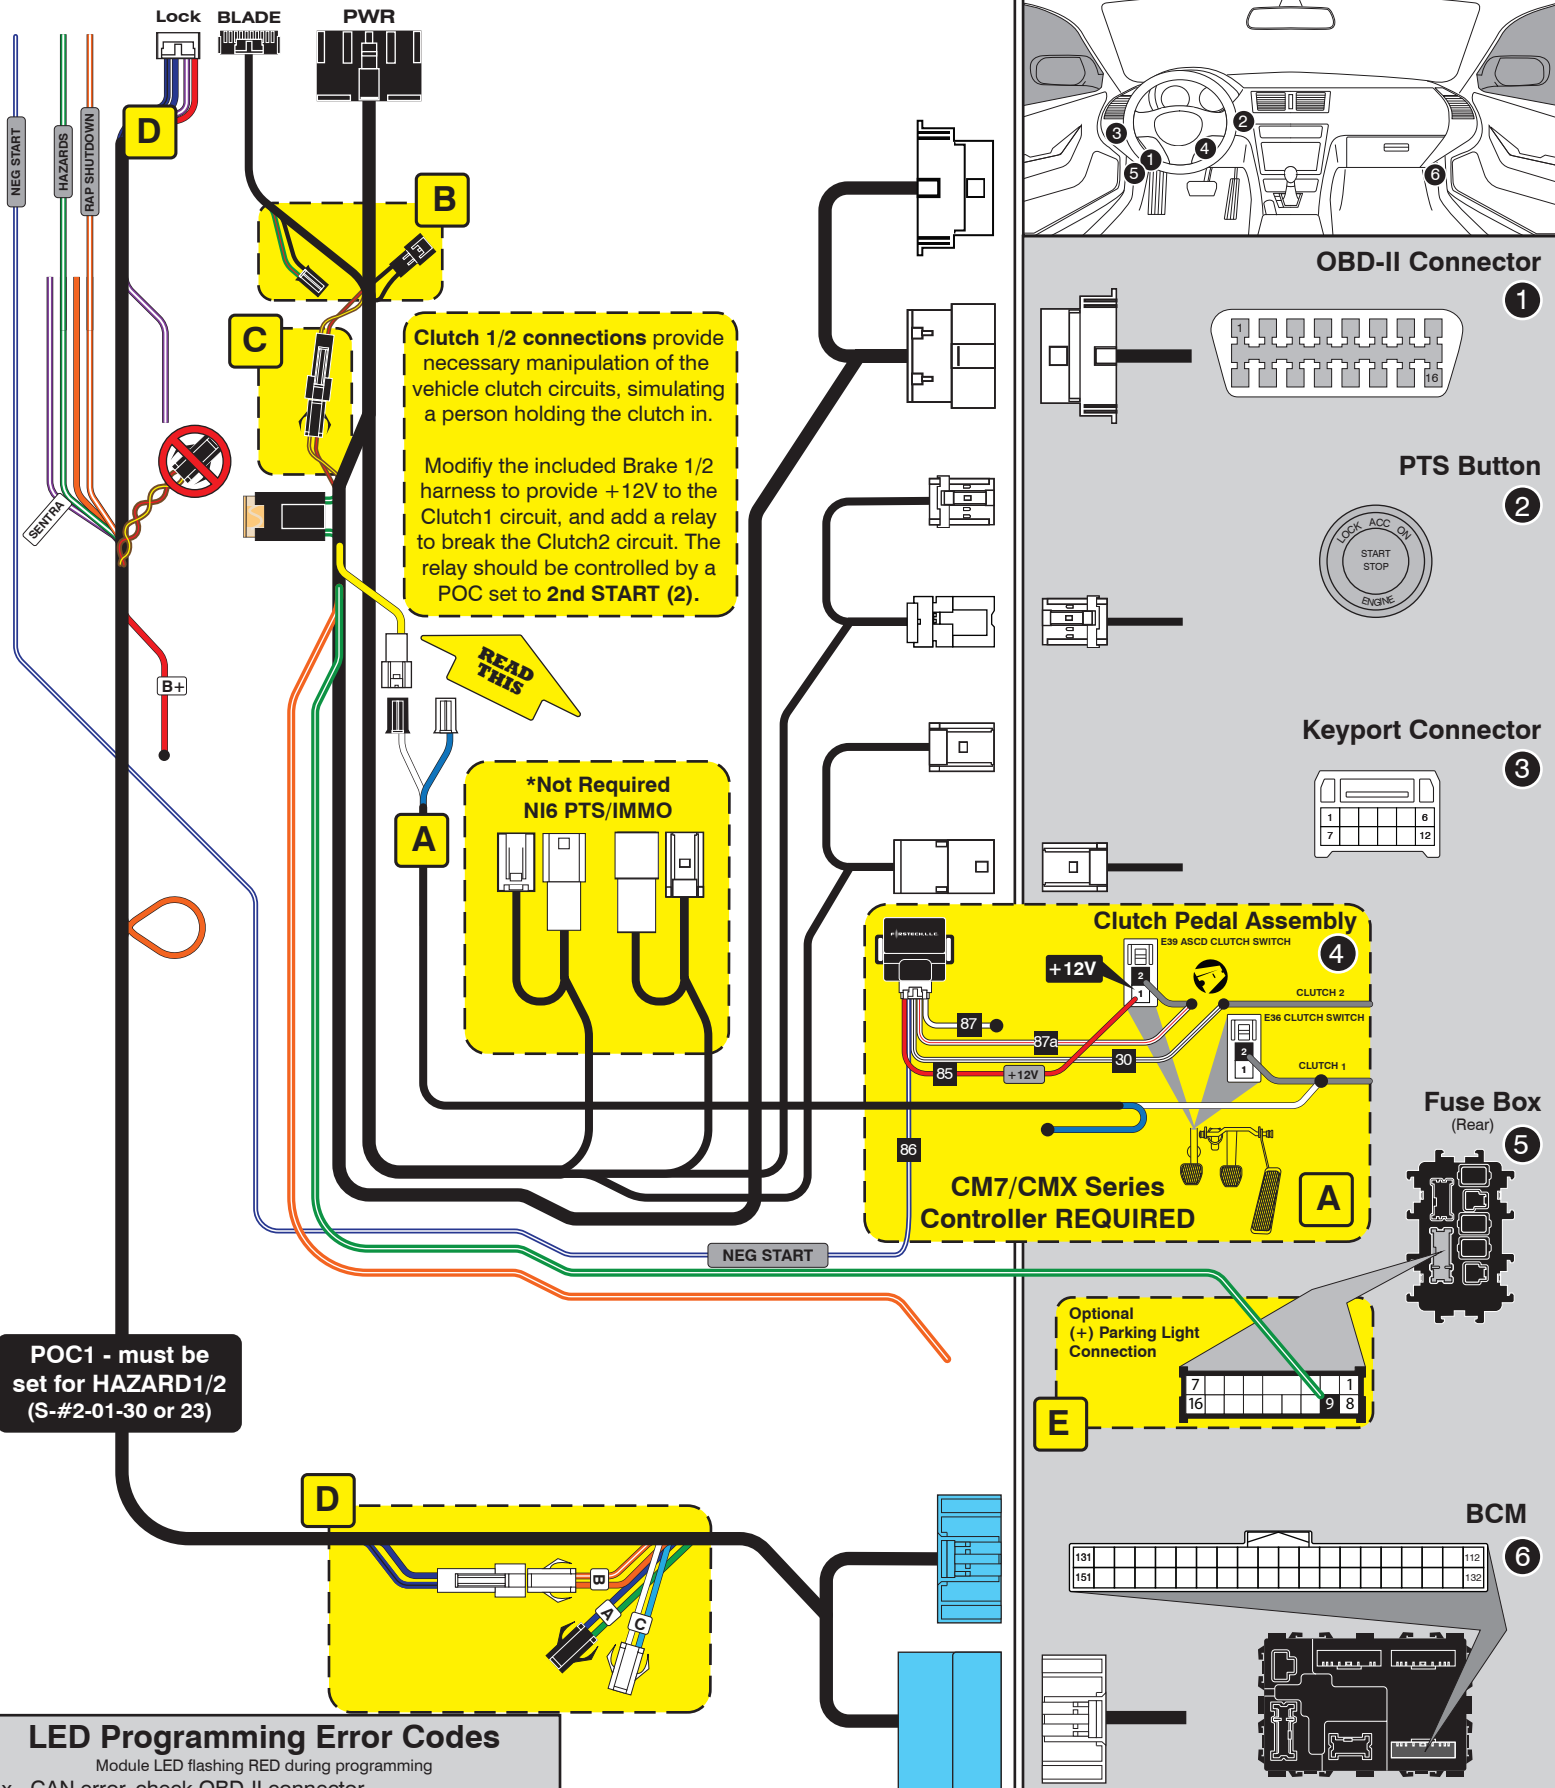


Clutch 1/2 connections provide necessary manipulation of the vehicle clutch circuits, simulating a person holding the clutch in.

Modify the included Brake 1/2 harness to provide +12V to the Clutch1 circuit, and add a relay to break the Clutch2 circuit. The relay should be controlled by a POC set to 2nd START (2).






***Not Required**
NI6 PTS/IMMO

POC1 - must be set for HAZARD1/2
(S-#2-01-30 or 23)

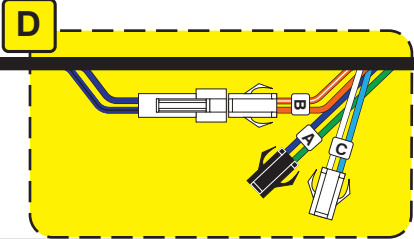

LED Programming Error Codes
Module LED flashing RED during programming

- 1x - CAN error, check OBD-II connector
- 2x - No PTS signal, check connector to PTS button
- 3x - No immobilizer data, check connector to key port
- 4x - No PTS signal, check connector to PTS button
- 5x - No immobilizer data, check connector to key port
- 6x - No ignition, check connector to OBD-II port
- 7x - Key error, confirm using only one key through process
- 8x - VIN error, confirm Weblink vehicle entry

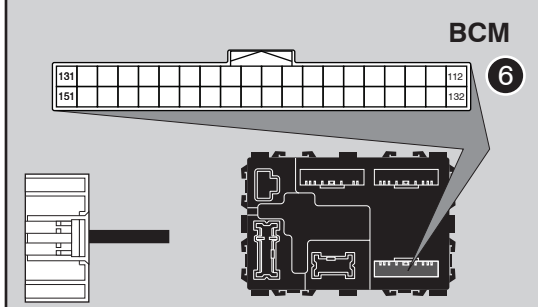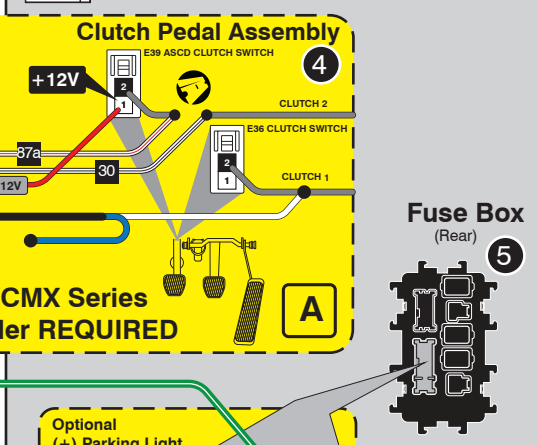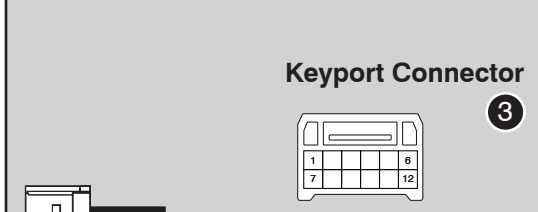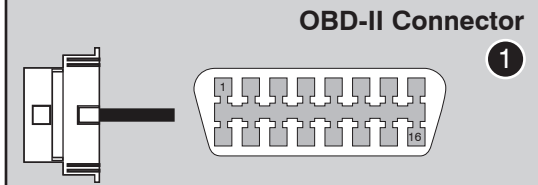

CARTRIDGE INSTALLATION



1 Slide cartridge into unit. Notice button under LED.


2

Ready for Module Programming Procedure.

MODULE PROGRAMMING PROCEDURE

NOTE

- 1 When programming, only one key fob will be used. The other one must be located at least 10 feet away from the vehicle.



Insert keyfob 1 in keyport.




2



DO NOT PRESS BRAKE PEDAL
Push start button twice [2x] to ON position.

3



Wait, LED will turn solid BLUE for 2 seconds.

4



DO NOT PRESS BRAKE PEDAL
Push start button once [1x] to OFF position.

5

Module Programming Procedure completed.

WARNING: READ BEFORE REMOTE STARTING THE VEHICLE

IMPORTANT

- I All vehicle doors must be closed and locked prior to remote start sequence. Failure to comply will result in remote starter malfunction.

TAKE OVER PROCEDURE - PUSH TO START - TO THE VEHICLE OWNER

NOTE

- I All vehicle doors must be closed and locked prior to remote start sequence.




TIME RESTRICTION COMING UP !

1



Unlock vehicle door using OEM or after-market remote, or door request switch.

2

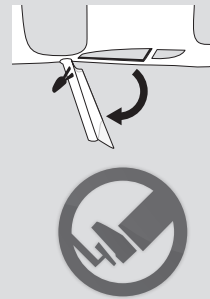

TIME RESTRICTION

Within 45 SECONDS from previous step:

Open vehicle door.
Enter vehicle.
Close vehicle door.

Press and release BRAKE pedal.

3

Take over procedure completed.



Failure to follow procedure will result in vehicle engine shutdown.