



FIRSTECH, LLC.
SUPPORT - 1(888) 820-3690, EXT. 203

Idle Mode is not a supported feature of the FTI-TLP3 Harness: The **Idle Mode** feature which allows the user to exit a running has been excluded from the **FTI-TLP3** harness wiring. *If this feature is desired, please refer to the full **BLADE** installation diagram for the applicable wiring and make the required connection to the vehicle PTS button.*

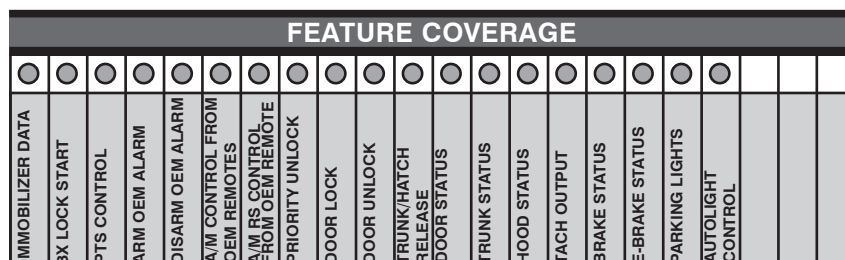

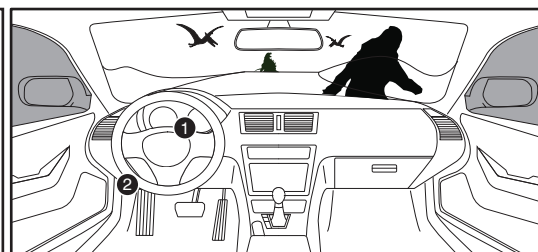


A diagram of a 7-segment display. The segments are labeled with numbers. The top-left segment is labeled '7' and the top-right segment is labeled '1'. The other segments (top, middle, bottom, and the two side segments) are not labeled.

- 1x - CAN error, confirm harness configuration
- 2x - No IGN, confirm IGN power and harness configuration
- 3x - IMMO/CAN error, confirm harness configuration
- 4x - No VIN, module may default to base platform #2
- 5x - Unknown VIN, module may default to base platform #2
- 6x - OEM starter detected, cycle IGN, if issue persists, remove and reprogram

TAKEOVER NOT SUPPORTED: THE VEHICLE WILL SHUT DOWN UPON OPENING DRIVER'S DOOR

CARTRIDGE INSTALLATION



Slide cartridge into unit. Notice button under LED.

2

Ready for Module Programming Procedure.


MODULE PROGRAMMING PROCEDURE

NOTE

I IMPORTANT: The hood must be closed.



Push start button twice [2x] to ON position.




Wait, if LED turns solid BLUE for 2 seconds, proceed to step 7.

If LED flashes BLUE rapidly, proceed to step 3.



Push start button once [1x] to OFF position.



Wait, LED will turn solid RED. (This may take up to 5 minutes.)



Push start button twice [2x] to ON position.



Wait, LED will turn solid BLUE for 2 seconds.



Push start button once [1x] to OFF position.

8

Module Programming Procedure completed.