

FIRSTECH, LLC.
SUPPORT • 1(888) 820-3690, EXT. 203

Idle Mode is not a supported feature of the FTI-TLP4 Harness: The Idle Mode feature which allows the user to exit a running has been excluded from the FTI-TLP4 harness wiring. ***If this feature is desired, please refer to the full BLADE installation diagram for the applicable wiring and make the required connection to the vehicle PTS button.***

• FT-DAS Required for manual transmission.
 • BOTH Red & Red/White MUST be connected with high current application.

Jumper Setting			
 Parking Light Accessory Ignition (Default)		(+)Door Trigger In (-)Door Trigger In (Default)	
 Trunk Starter Parking Light (Default)		Starter Ignition Accessory (Default)	





CM7000/7200

Cut loop for A/T




CM900S/900AS

CM900AS/900S Jumper	
	START ACC IGN1

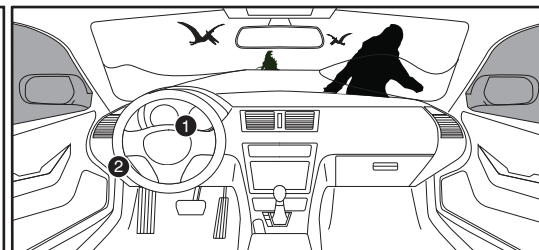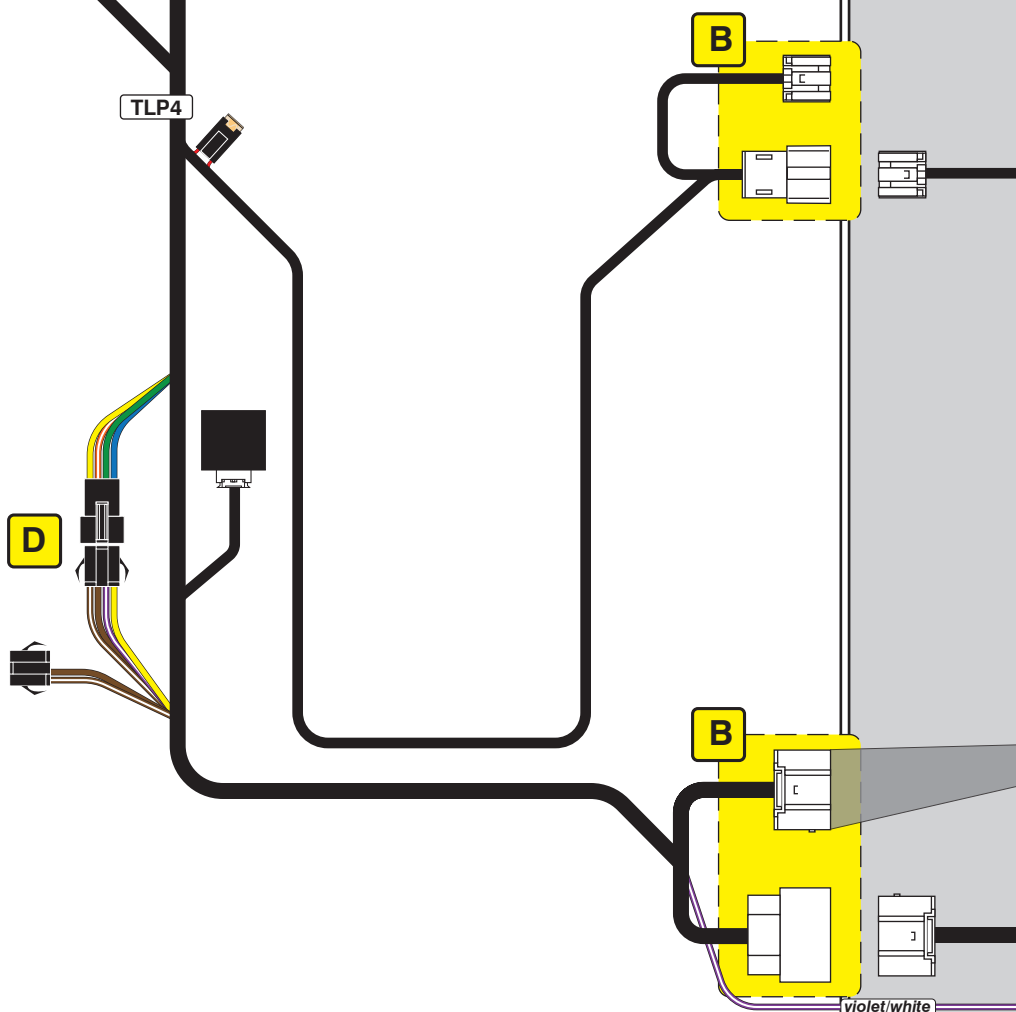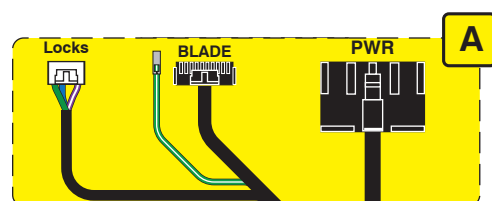


Steering Lock Connector



Main Body ECU



C




LED Programming Error Codes

Module LED flashing RED during programming

- 1x - No CAN detected, check connections
- 2x - VIN not read, check connections
- 3x - VIN unknown, force platform
- 4x - No IMMO
- 5x - OEM remote starter detected, remove
- 6x - Key platform detected, check connections
- 7x - No RX detected, check connections
- 8x - No TX detected, check connections

TAKEOVER NOT SUPPORTED: THE VEHICLE WILL SHUT DOWN UPON OPENING DRIVER'S DOOR

CARTRIDGE INSTALLATION

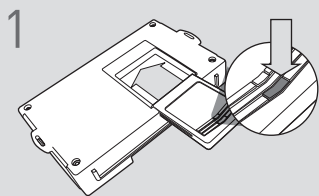

Slide cartridge into unit. Notice button under LED.

2

Ready for Module Programming Procedure.


MODULE PROGRAMMING PROCEDURE

NOTE

I Between each step, LED will turn solid RED, this is the default standby mode.



Push start button twice [2x] to ON position.




LED will turn solid RED.



Within 5 seconds, LED will flash BLUE rapidly.



Push start button once [1x] to OFF position.



Press unlock button once [1x] on OEM keyfob.



Wait, LED will turn solid BLUE for 2 seconds.

7

Module Programming Procedure completed.

TAKEOVER NOT AVAILABLE