

Make	Model	Year	Install	CAN	Lights	IGN	RAP	I/O Changes
DL-CH12 Chrysler	Grand Caravan PTS	2021	Type 1C	F/JC	Park / Auto Type B2	PINK	NO	Green White/Blue N/A

FIRMWARE:

This installation requires BLADE-AL(DL)-CH12, flash module and update the controller firmware before installing.

INSTALLATION:

Type 1C vehicles use CAN extension cable to make connections at the firewall junction connector, located above the driver kick panel and attached to firewall (CANH, pin #17, tan/white, CANL, pin #18, yellow).

LIGHTS:

Type B2 parking lights use the 10-pin connector, but require additional circuit manipulation at the BLADE connector, redirecting the yellow (MUX) output to a 500 Ohm resistor and the controller green/white (-) parking light output.

IGNITION:

Type 1C ignition is available at junction connector located above the driver kick panel, attached to the firewall, vehicle wire is located at pin #39, pink/lt. green, of the 59-pin connector

FTI-CDP1 - Installation and Configuration Notes

- A** REQUIRED CONNECTION (CAN extension cable)
- B** NOT REQUIRED (Harness CAN)
- C** REQUIRED CONFIGURATION (PINK)
- D** REQUIRED CONNECTION (IGN)
- E** MODIFICATION REQUIRED (see Lights note above)

•FT-DAS Required for manual transmission.
•BOTH Red & Red/White MUST be connected with high current application.

Jumper Setting

Parking Light	Accessory	Ignition (Default)	(+)Door Trigger In (Default)	(-)Door Trigger In (Default)
Trunk	Starter	Parking Light (Default)	Starter	Ignition
			Accessory (Default)	

CM7000/7200 Cut loop for A/T




CM-900S/900AS

CM900AS/900S Jumper

START
ACC
IGN1



FEATURE COVERAGE																				
IMMOBILIZER DATA	ARM OEM ALARM	DISARM OEM ALARM	DOOR LOCK	DOOR UNLOCK	PRIORITY UNLOCK	TRUNK/HATCH RELEASE	POWER LIFTGATE	POWER SLIDING DOOR (L)	POWER SLIDING DOOR (R)	SECURE TAKEOVER	DOOR STATUS	TRUNK STATUS	HOOD STATUS	E-BRAKE STATUS	TACH OUTPUT	BRAKE STATUS	GLOW PLUG STATUS	PARKING LIGHTS	HAZARD LIGHTS	A/M CONTROL

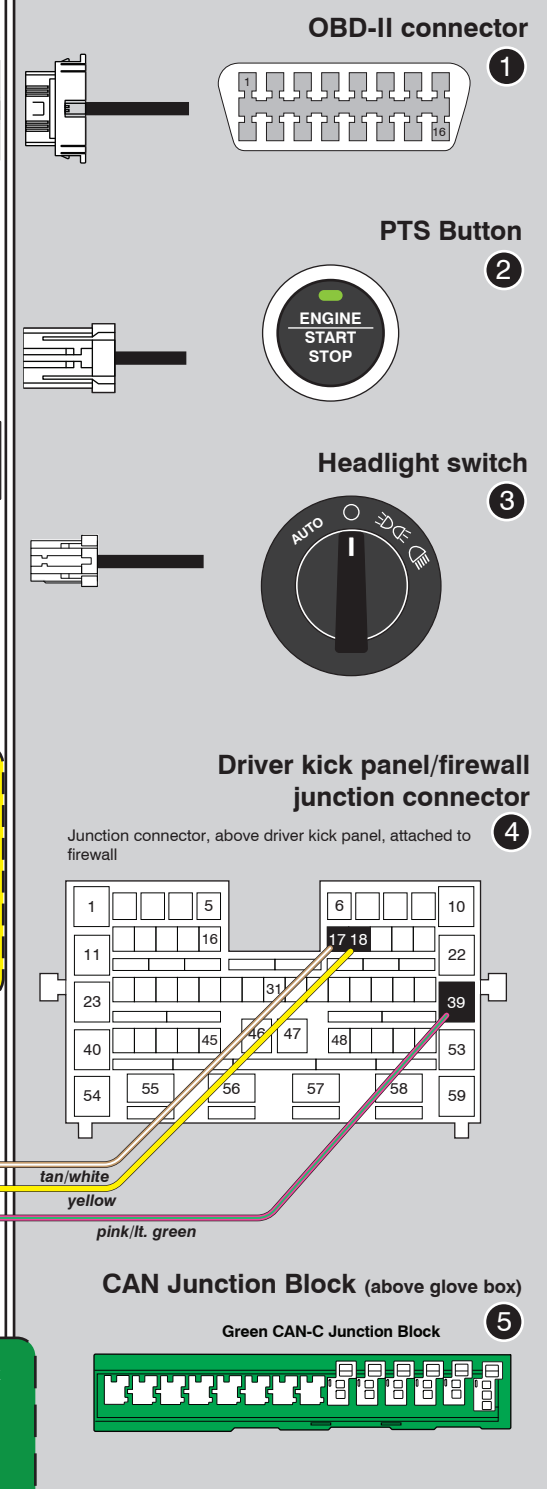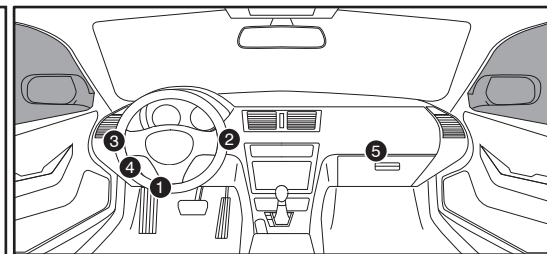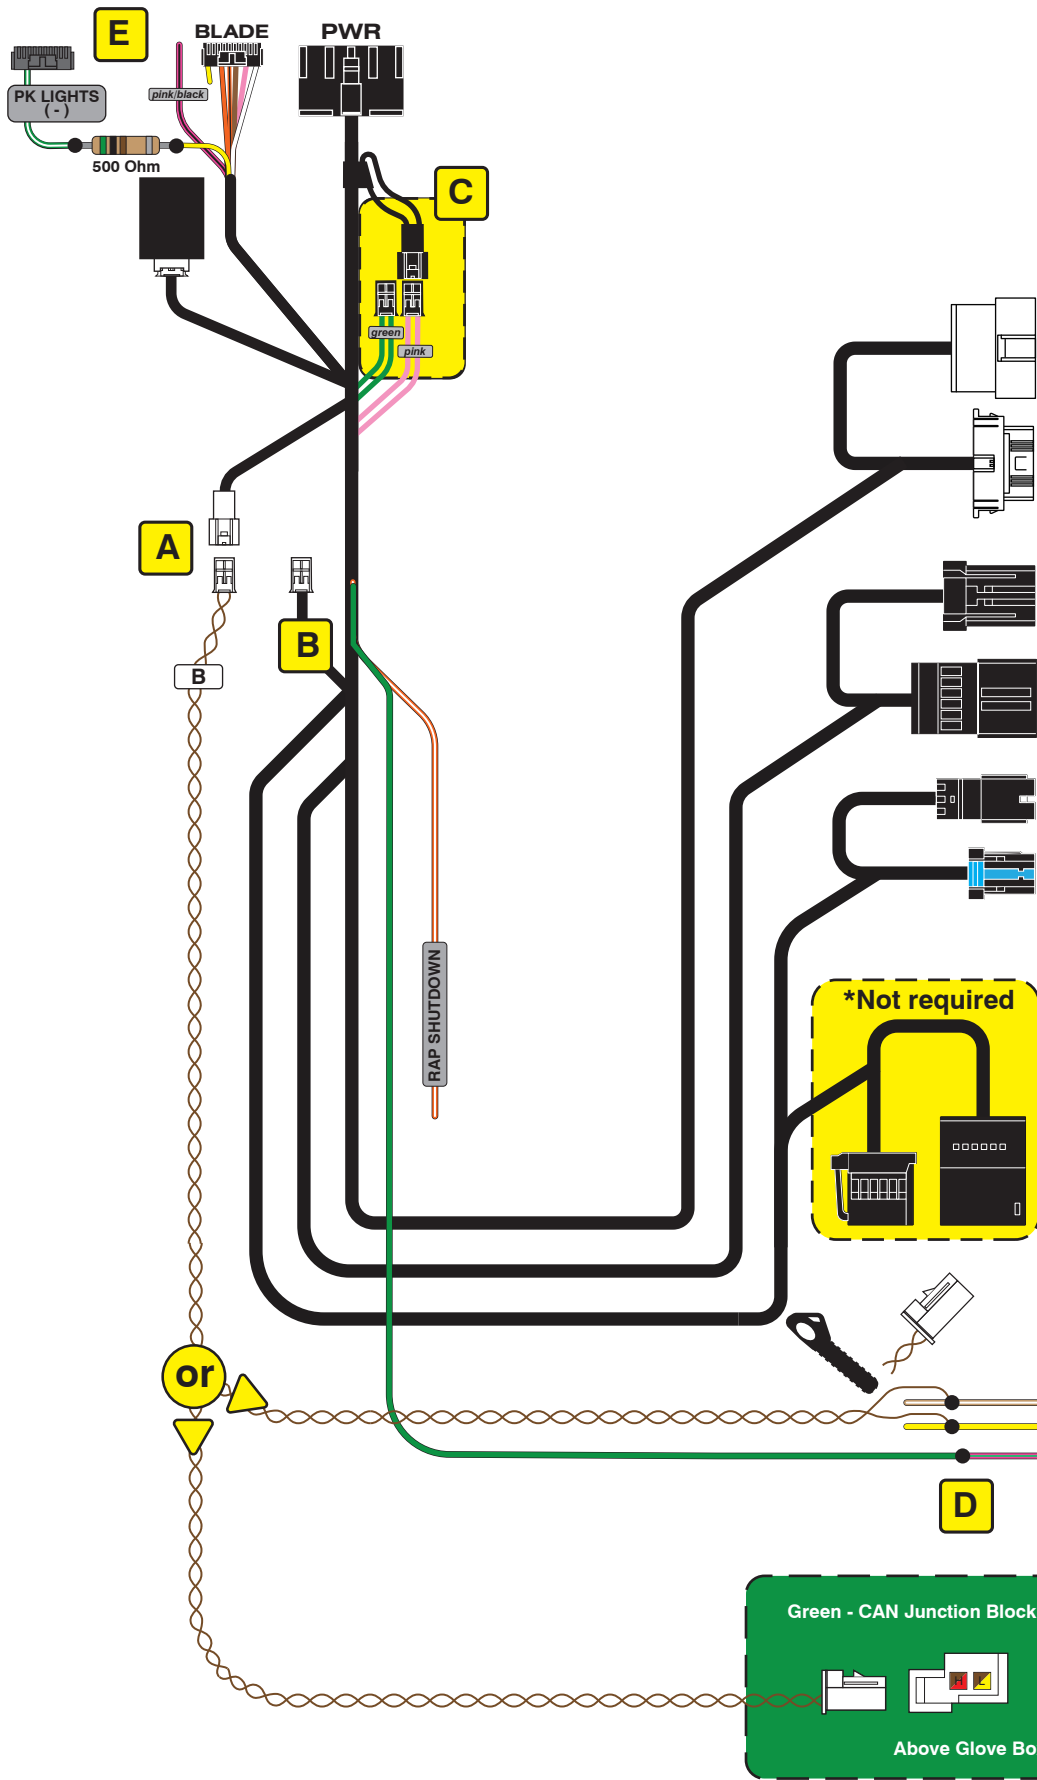



- LED Programming Error Codes**
Module LED flashing RED during programming
- 1x - CAN Error
 - 2x - Key code not learned
 - 3x - No IGNITION
 - 4x - No immobilizer, check CAN/key
 - 5x - VIN error, check CAN wiring
 - 6x - See 4x error
 - 7x - KLON error
 - 8x - No IGNITION, check connection

MODULE PROGRAMMING PROCEDURE - PTS


NOTE


I **IMPORTANT:** The hood must be closed.

1  Close driver door.
Re-open driver door to wake up data bus.


2  Press UNLOCK on OEM remote.


(If the vehicle is not equipped with an OEM remote, press on the module programming button.)

3  Wait, LED will flash BLUE once [1x]. If LED does not flash GREEN, repeat step 2.


4  Set ignition to ON position.




5  Wait, if LED turns solid RED proceed to step 6.
If LED flashes BLUE rapidly, proceed to step 10.


6  Set ignition to OFF position.




7  Repeat steps 4 to 6, eight times [8x].


8  Set ignition to ON position.




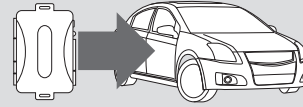
9  Wait, LED will flash BLUE rapidly.

10  Set ignition to OFF position.

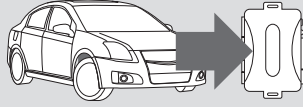


11  **WARNING:**
Disconnect power last.
Disconnect module from vehicle.


12  Connect module to computer and proceed with extended programming.

13  **WARNING:** Do not press module programming button.
Connect power first.
Connect module to vehicle.

14  Set ignition to ON position.



15  Wait, LED will turn solid BLUE for 2 seconds.

16  Set ignition to OFF position.



17 **Module Programming Procedure completed.**

WARNING: READ BEFORE REMOTE STARTING THE VEHICLE

IMPORTANT

- I All vehicle doors must be closed and locked prior to remote start sequence. Failure to comply will result in remote starter malfunction.

TAKE OVER PROCEDURE - PTS - TO THE VEHICLE OWNER

NOTE

- I All vehicle doors must be closed and locked prior to remote start sequence.




TIME RESTRICTION COMING UP !

1



Unlock vehicle door using OEM or after-market remote, or door request switch.

2



TIME RESTRICTION

Within 45 SECONDS from previous step:

Open vehicle door.
Enter vehicle.
Close vehicle door.

Press and release BRAKE pedal.

3

Take over procedure completed.



Failure to follow procedure will result in vehicle engine shutdown.