

Make	Model	Year	Install	BCM	Lights	Locks	POC 1	I/O Changes
DL-NI4 Nissan	Xterra STD Key MT	2005-15	Type 1	RSC	Park / Auto NI-LOCK*	DATA	Hazard1/2	Green White/Blue START2/ACC

Installation **Type 1** requires **BLADE-AL(DL)-NI4**, flash module and update the controller firmware before beginning the installation.

I/O Changes: Each vehicle in this installation group have different configuration requirements for proper handling of ACC and START circuit handling. Please ensure that the appropriate changes have been made before testing.

The required, controller specific, changes are listed below.

CM900S/900AS I/O Changes:

START2: Set feature option **1-6-2** (starter output 10A max), connect **green/white** to **yellow** (2nd START) at configuration point [C]

ACC: Move CM jumper to ACC to change CN1 **blue** wire to accessory, connect to **blue** (2nd ACC) at configuration point [C]

Optional Hazard Light Control:

NI-LOCK harness **green/white** is pre-wired for hazards, connect harness wire to the controller POC1 (**green/white**), additional configuration required. Vehicles equipped with a **MOMENTARY** activation switch require that POC1 be configured for **Hazard light** (POC option #30), if the switch is **LATCHING** type you will use **Hazard light 2** (POC option #23).

Clutch Bypass: M/T equipped Xterra requires additional wiring and configuration to provide a clutch signal bypass. Select a POC and change its feature option setting to Option 2 (2nd START). Use the configured POC to activate a relay to provide +12V during start, to the **blue** wire at the clutch switch.

Auto-Light OFF:

NI-LOCK harness **orange** is pre-wired for Auto-light shut off, if the vehicle is equipped with auto-lights connect CM REARM output (**orange**) to **orange** wire in harness.

D **NI-LOCK harness configuration:** Configure Double Pulse Unlock (**feature 1-04, option 2**) Vehicle lock functions are handled through data, additional harness configuration is not required.

NI-LOCK* vehicles require additional wiring and a relay to open the auto-light shutdown loop provided on the NI-LOCK harness.

FTI-NSK1: Installation and Configuration Notes

- A** CUTS REQUIRED - INSULATE AFTER CUTTING
- B** REQUIRED CONNECTION - USE JUMPER IF NO IMMOBILIZER
- C** CONNECT AS ILLUSTRATED
- D** CONNECT AS ILLUSTRATED
- E** CONNECT AS ILLUSTRATED



FEATURE COVERAGE																	
IMMOBILIZER DATA	PRIORITY UNLOCK	DOOR LOCK	DOOR UNLOCK	ARM OEM ALARM	DISARM OEM ALARM	TRUNK/HATCH RELEASE	A/M ALARM CTRL	A/M RS CONTROL	HOOD STATUS	DOOR STATUS	TRUNK STATUS	BRAKE STATUS	E-BRAKE STATUS	TACH OUTPUT	SECURE TAKEOVER	PARKING LIGHTS	HAZARD LIGHTS
○	○	○	○							○	○	○	○	○			○

- FT-DAS Required for manual transmission.
- BOTH Red & Red/White MUST be connected with high current application.


Jumper Setting

Parking Light	Accessory	Ignition (Default)	(+)Door Trigger In (Default)	(-)Door Trigger In (Default)
Trunk	Starter	Parking Light (Default)	Starter Ignition	Accessory (Default)

CM7000/7200 Cut loop for A/T

CM-900S/900AS

CM900AS/900S Jumper

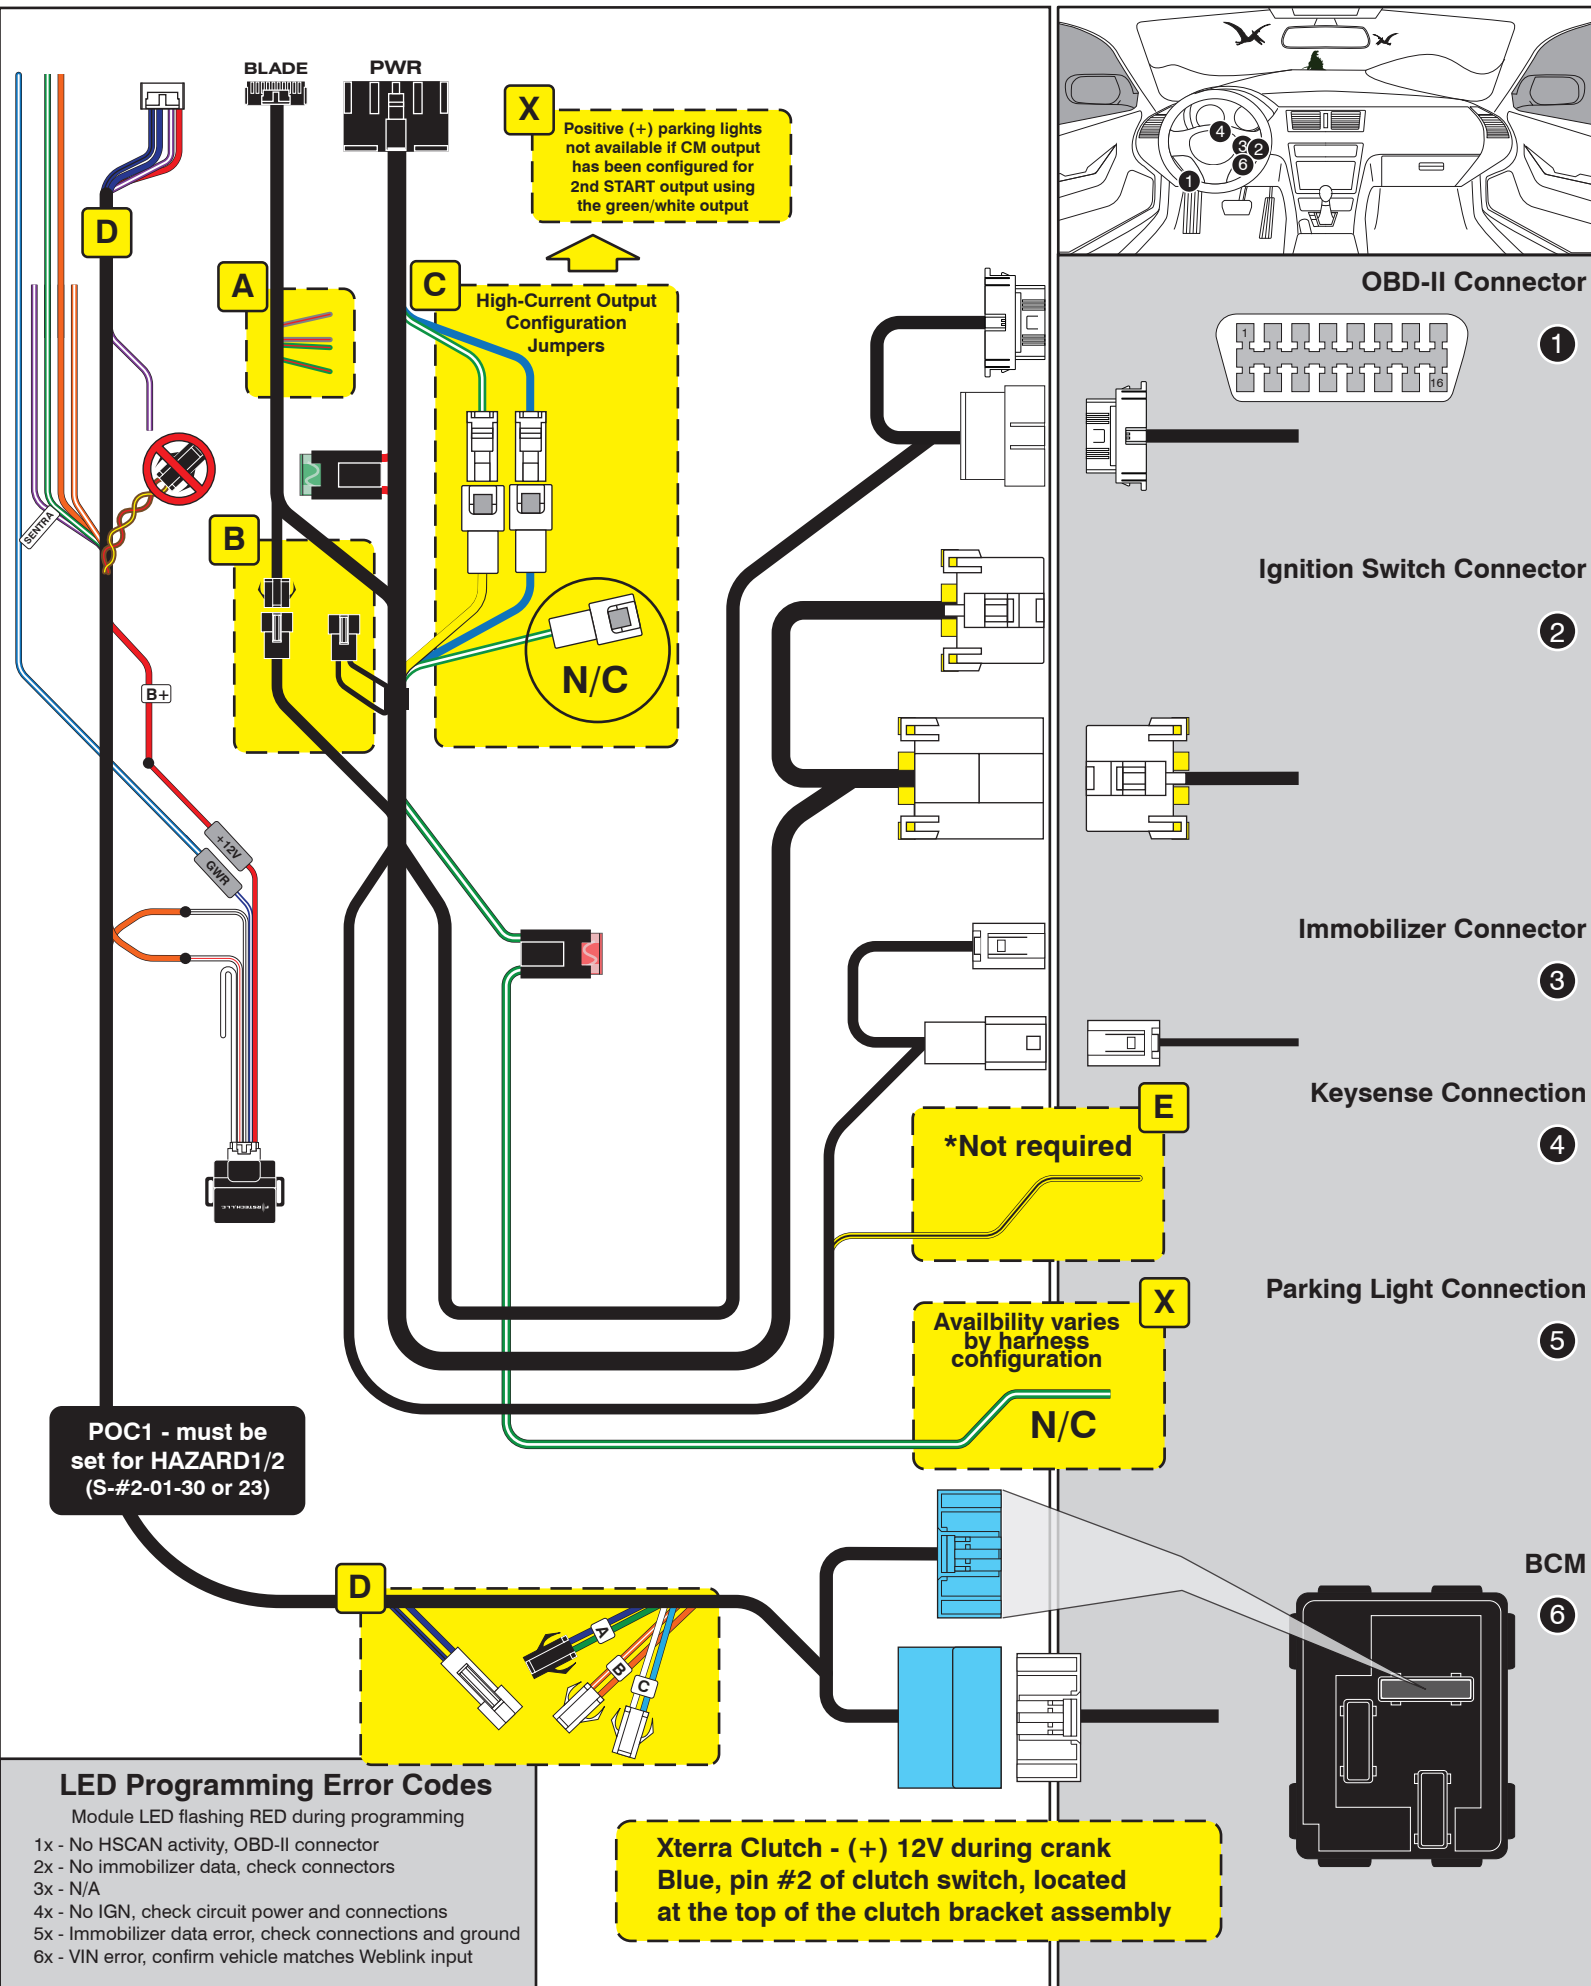

X Positive (+) parking lights not available if CM output has been configured for 2nd START output using the green/white output

C High-Current Output Configuration Jumpers

N/C

E *Not required

X Availability varies by harness configuration









N/C

POC1 - must be set for HAZARD1/2 (S-#2-01-30 or 23)

LED Programming Error Codes

- Module LED flashing RED during programming
- 1x - No HSCAN activity, OBD-II connector
 - 2x - No immobilizer data, check connectors
 - 3x - N/A
 - 4x - No IGN, check circuit power and connections
 - 5x - Immobilizer data error, check connections and ground
 - 6x - VIN error, confirm vehicle matches Weblink input

Xterra Clutch - (+) 12V during crank
Blue, pin #2 of clutch switch, located at the top of the clutch bracket assembly

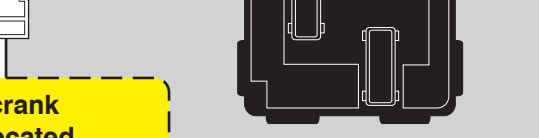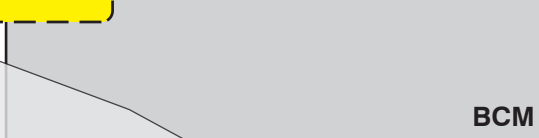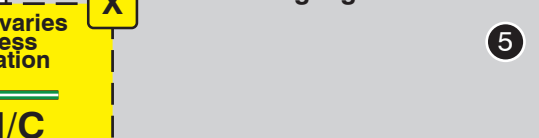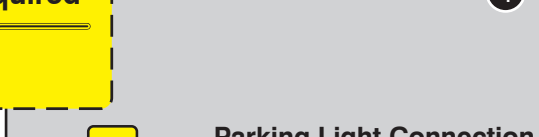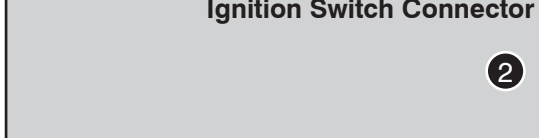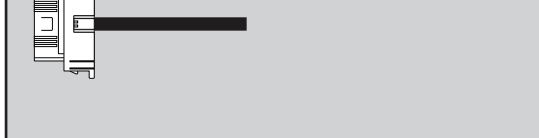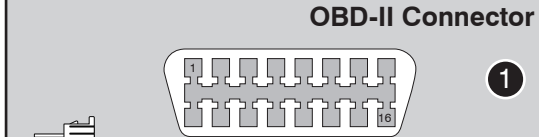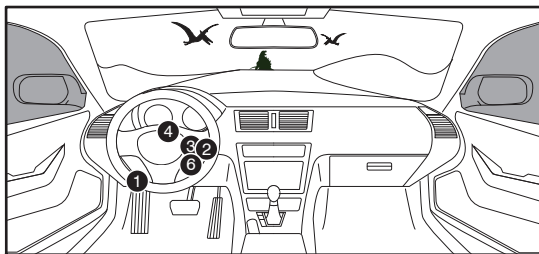

CARTRIDGE INSTALLATION



1 Slide cartridge into unit. Notice button under LED.

2

Ready for Module Programming Procedure.

MODULE PROGRAMMING PROCEDURE

NOTE

I To complete this procedure, use one regular key or one valet key.



II When programming, all key fobs must be located at least 10 feet away from the vehicle.




1 Insert key into ignition.

2



Turn key to ON position.

3



Wait, LED will turn solid BLUE for 2 seconds.

4



Turn key to OFF position.

5

Module Programming Procedure completed.